






DATASHEET

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 2m

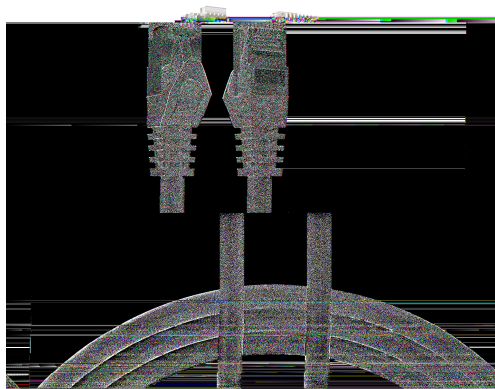

General data

The unshielded Cat.6 RJ45 patch cable with ensures excellent performance for 5 Gigabit Ethernet applications. The moulded grommet captivates with its **slim design** and thus simplifies the insertion process in cramped conditions.

Cross section 4 x 2 x **AWG24/7**

Moulded grommet, slim design

Length imprint on the boot

Allgemeine Daten

Model	Unshielded
Suitable for degree of protection (IP)	IP20
Fire retardant version	True
Jacket Material	LSZH

This datasheet was created automatically on 08-05-2024 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 2m

AWG-size	24/7
----------	------

General data

Pin assignment	1:1
Locking lever	True
Colour anti-kink sleeve	grey
Contacts	Gold plated μ " gold plated
Allocation	acc. TIA/EIA 568B
Connector type	RJ45 Standard
Cable type	U/UTP
Area of Application	Industrial Ethernet
Colour outer sheath	grey
Anti-kink sleeve	plugged in
Halogen free	True
Category	6

Mechanical characteristics

Bending radius	30 mm
Mating cycles	750

Cable construction

Conductor Material	CCA
--------------------	-----

Kabelaufbau

Type of connector connection 2	RJ45 8(8)
Type of connector connection 1	RJ45 8(8)
Cable construction	4x2

Cable sheath

Low smoke	True
Oil resistant (according to EN 60811-404)	False
Silicone-free	True
Flame retardant	True

Kabelmantel

This datasheet was created automatically on 08-05-2024 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 2m

Printing	Cat.6 U/UTP AWG24/7 stranded x 4pairs LSZH cable www.efb-elektronik.de
Outer diameter of the cable	5.9 mm
Halogen-free	True

Electrical characteristics

NVP value	- %
POE class	PoE+ acc. to IEEE802.3at
Current Rating	max. 1 A

Elektrische Eigenschaften

Operating-/ tempering voltage	max. 50 V DC
-------------------------------	--------------

Übertragungstechnische Eigenschaften

Bandwidth	250MHz
Transmission	5Gbit

Standards, approvals, certifications

Cabling standard	EN50173
Connector	IEC 60603-7-4
Oil resistant (acc. EN 60811-2-1)	False

Available variants

ArtNr.	Bezeichnung	Length	Längentoleranz
K8104GR.0,25	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 0,25m	0.25 m	± 5 %
K8104GR.0,5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 0,5m	0.5 m	± 5 %
K8104GR.1	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 1m	1.0 m	± 5 %
K8104GR.1,5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 1,5m	1.5 m	± 5 %
K8104GR.2	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 2m	2.0 m	± 5 %
K8104GR.3	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 3m	3.0 m	± 5 %
K8104GR.5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 5m	5.0 m	± 5 %
K8104GR.7,5	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 7,5m	7.5 m	± 5 %
K8104GR.10	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 10m	10.0 m	± 5 %
K8104GR.15	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 15m	15.0 m	± 5 %
K8104GR.20	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 20m	20.0 m	± 5 %
K8104GR.25	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 25m	25.0 m	± 5 %
K8104GR.30	RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 30m	30.0 m	± 5 %

This datasheet was created automatically on 08-05-2024 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 2m


K8104GR.50

RJ45 Patch Cord Cat.6 U/UTP LSZH CCA grey 50m

50.0 m

± 5 %

Drawings

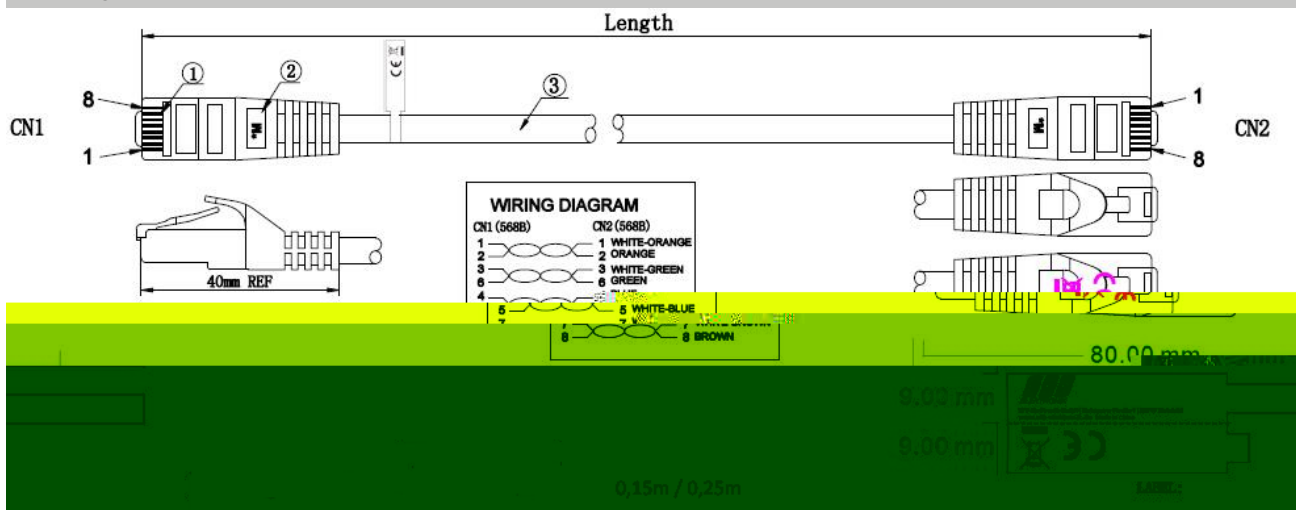

This datasheet was created automatically on 08-05-2024 . Technical changes reserved.

