


DATASHEET

Power Cable CEE7/7 90° - C13 180° Black 1,0 m, 3 x 0.75 mm²

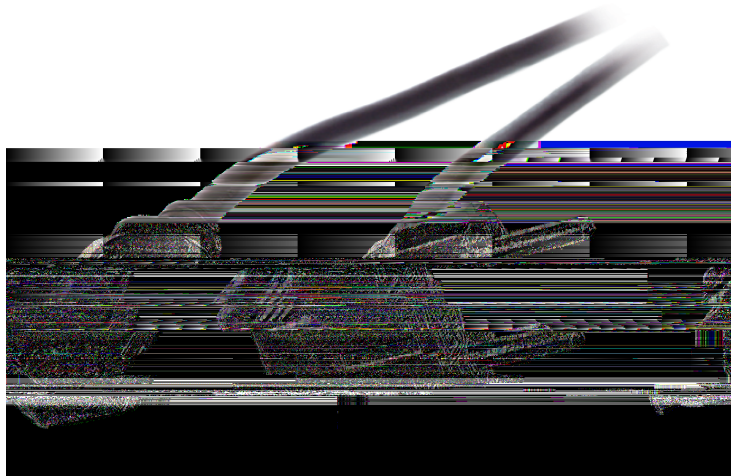

General data

10 A / 250 V VDE tested
Suitable for Germany, Belgium, France and further

Allgemeine Daten

Number of cores	3
Colour outer sheath	black
With cord switch	False
Jacket Material	Polyvinyl chloride (PVC)

General data

Spiralized cable	False
Halogen free	False

Mechanische Eigenschaften

Connection 1	Socket outlet with protective contact, right-angled
Connection 2	Cold device plug straight, female

Cable sheath

Oil resistant (according to EN 60811-404)	False
---	-------

Kabelmantel

Temperature resistance	0 - 70 °C
------------------------	-----------

This datasheet was created automatically on 27-08-2024 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 180° Black 1,0 m, 3 x 0.75 mm²

Electrical characteristics

Protective conductor | Ja

Elektrische Eigenschaften

Nominal voltage | 250 V

Standards, approvals, certifications

Oil resistant (acc. EN 60811-2-1) | False

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length Leiternennquerschnitt		Außendurchmesser ca.
EK504.0,5V2	Power Cable CEE7/7 90° - C13 180° Black 0.5 m, 3 x 0.75 mm ²	black	0.5 m	0,75 mm ²	6,5 mm
EK504.0,75V2	Power Cable CEE7/7 90° - C13 180° Black 0.75 m, 3 x 0.75 mm ²	black	0.75 m	0,75 mm ²	6,5 mm
EK504.1V2	Power Cable CEE7/7 90° - C13 180° Black 1,0 m, 3 x 0.75 mm ²	black	1.0 m	0,75 mm ²	6,5 mm
EK504.2V2	Power Cable CEE7/7 90° - C13 180°, Black 2.0 m, 3 x 0.75 mm ²	black	2.0 m	0,75 mm ²	6,5 mm
EK504.3V2	Power Cable CEE7/7 90° - C13 180°, Black 3.0 m, 3 x 1.00 mm ²	black	3.0 m	1,00 mm ²	7,0 mm
EK504.5V2	Power Cable CEE7/7 90° - C13 180°, Black 5.0 m, 3 x 1.00 mm ²	black	5.0 m	1,00 mm ²	7,0 mm

Drawings

This datasheet was created automatically on 27-08-2024 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 180° Black 1,0 m, 3 x 0.75 mm²



This datasheet was created automatically on 27-08-2024 . Technical changes reserved.

