

INORAX-AL NETWORK RACK CABINET

Inorax-AL network rack cabinet system offers the best solution for IT and Telecom applications in dense and complex cabling environments. A wide range of cable management accessories is available to ensure perfect management of copper & fiber cables and 19" equipment. Vertical 19" mounting rails can be adjusted freely through the depth, which simplify mounting of any device and configuration of connecting cables. Black tinted left and right sections on the front glass door hide the excess cables from the view of the user and gives an aesthetic look to the rack. Flat-pack option enables savings up to 60% in the transport cost and warehouse space.

Technical Features

Material	Frame; Anodized aluminium extrusion profiles Other parts: 1.0 mm, 1.2 mm, 2.0 mm steel
Color	RAL 7035 or RAL 9005
Compliance	RoHS, UL Certified
Packaging	Assembled or unassembled
Maximum Static Load	Up to 2000 kg. (600 mm x 600 mm)
Finish	Doors, side panels, top covers: Electrostatic Powder Paint 19" mounting rails: Zinc-plated

Standard Configuration:

- Front door with safety glass
- Solid Side Panels with cylindrical locks and latches
- Solid Rear Panel with cylindrical locks
- Internal top sheet with 3 cable entries for 800 width, 1 cable entry for 600 width racks and fan cut-outs
- 2 Pairs of depth adjustable heavy duty 19" Mounting Rails
- 2 Pairs of Adjustable Feet
- Front Door with swing-handle single point lock
- Bottom sheet is not included




CERTIFIED



CERTIFIED



MAX. STATIC LOAD





PACKAGING


RAL 9005

RAL 7035


COLOR

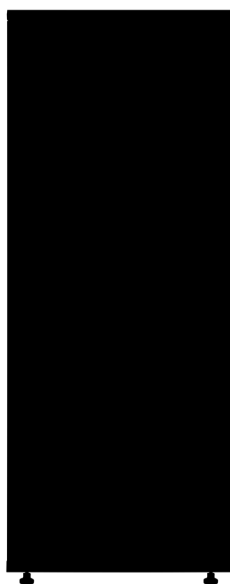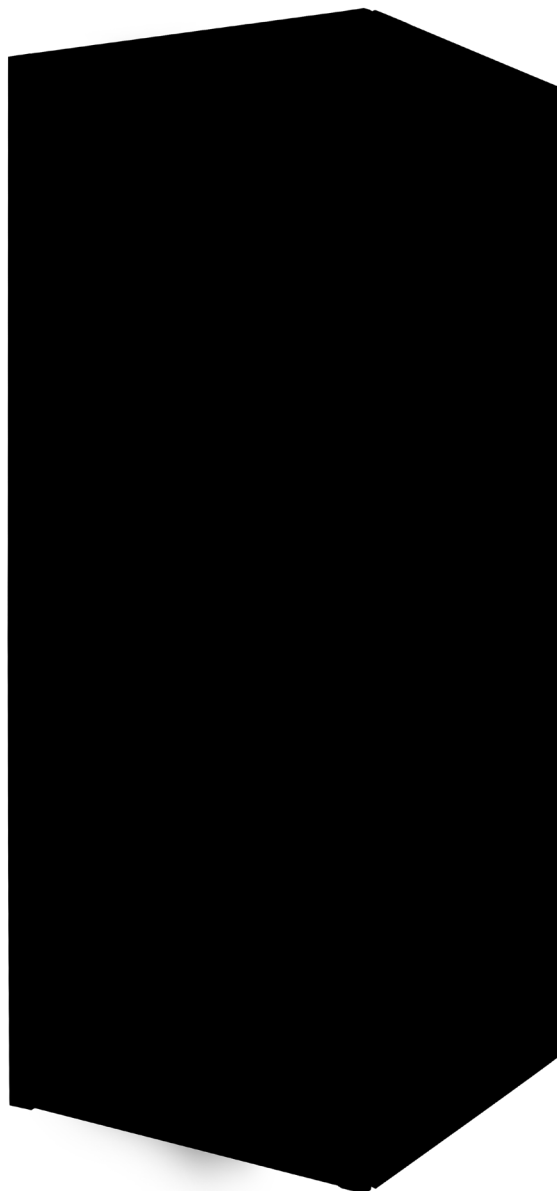

Front View

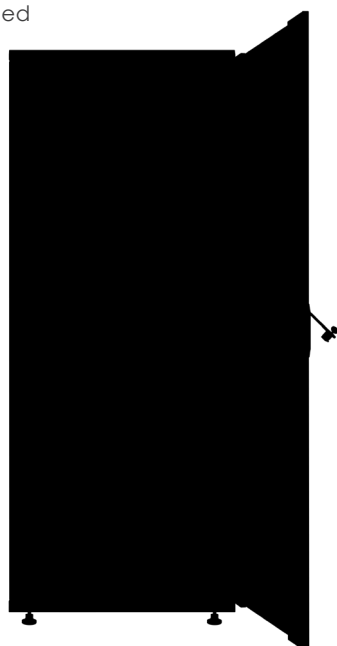

Front View Open

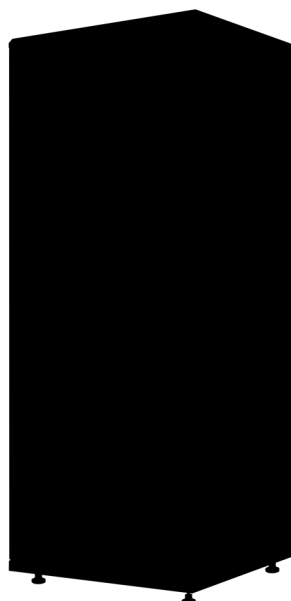

3/4 View



Side View

TECHNICAL DRAWING

Order Information

Height (U)	Outer Width (W) mm	Outer Depth (D) mm	Outer Height (H) mm	Inner Width (w1) mm	Inner Depth (d1) mm	Inner Height (h1) mm	19" Rails Adjustable Depth Range (c)	Weight (kg)	Part No
26U	600	600	1322	503	550	1187	129-429	57	CPN-X-2666A
26U	600	800	1322	503	750	1187	129-629	74	CPN-X-2668A
26U	800	800	1322	703	750	1187	129-629	84	CPN-X-2688A
32U	600	600	1589	503	550	1454	129-429	67	CPN-X-3266A
32U	600	800	1589	503	750	1454	129-629	83	CPN-X-3268A
32U	800	800	1589	703	750	1454	129-629	95	CPN-X-3288A
36U	600	600	1767	503	550	1632	129-429	74	CPN-X-3666A
36U	600	800	1767	503	750	1632	129-629	88	CPN-X-3668A
36U	800	800	1767	703	750	1632	129-629	103	CPN-X-3688A
39U	800	800	1900	703	750	1765	129-629	108	CPN-X-3988A
42U	600	600	2033	503	550	1898	129-429	85	CPN-X-4266A
42U	600	800	2033	503	750	1898	129-629	97	CPN-X-4268A
42U	600	1000	2033	503	950	1898	129-829	103	CPN-X-4260A
42U	800	800	2033	703	750	1898	129-629	114	CPN-X-4288A
42U	800	1000	2033	703	950	1898	129-829	119	CPN-X-4280A
47U	600	600	2255	503	550	2120	129-429	93	CPN-X-4766A
47U	600	800	2255	503	750	2120	129-629	104	CPN-X-4768A
47U	600	1000	2255	503	950	2120	129-829	120	CPN-X-4760A
47U	800	800	2255	703	750	2120	129-629	124	CPN-X-4788A
47U	800	1000	2255	703	950	2120	129-829	130	CPN-X-4780A

X (Color code): 7:RAL 7035 Light Grey, 9:RAL 9005 Black