

TX6000™ Enhanced Category 6 U/UTP Copper Cable

Europe and
Asia Pacific

PANDUIT™
SPECIFICATION SHEET

specifications

Category 6 cable shall exceed IEC 61156-5 and ANSI/TIA-568.2-D Category 6 component standards. The conductors shall be 23 AWG construction with HDPE insulation. The copper conductors shall be twisted in pairs, separated by a cross divider, and all four pairs shall be covered by a LSFRZH jacket.



technical information

Electrical performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds ISO 11801 Class E and ANSI/TIA-568.2-D Category 6 standards at swept frequencies up to 250 MHz Certified component performance up to 100 meters and exceeds the component requirements of IEC 61156-5 and ANSI/TIA-568.2-D Category 6 component standards at swept frequencies up to 250 MHz
Conductor/Insulator:	23 AWG solid copper insulated with HDPE
Insulation diameter:	0.93-1.06mm (0.037-0.042")
Flame rating:	IEC 60332-1, IEC 60754-1 and -2, IEC 61034-2, EN 50575: Cca-s1a,d1,a1
PoE compliance:	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
Installation tension:	110 N (25 lbf) maximum
Temperature rating:	0°C to 50°C (32°F to 122°F) during installation -20°C to 75°C (-4°F to 167°F) during operation
Cable jacket:	LSFRZH
Cable diameter:	5.8mm (0.232") nominal
Cable weight:	12 kg/305m (26 lbs./1000')
Packaging:	305m (1000'), Reelex™ Packaging Package tested to ISTA procedure 1A

key features and benefits

Third party tested:	Cable is tested as part of the TX6000 Copper Cabling System by an independent laboratory and complies with the electrical channel requirements of the following standards: ISO 11801 Class E, EN 50173-1, and ANSI/TIA-568.2-D Category 6
Guaranteed channel performance above the standards:	Industry leading channel performance above the TIA/ISO standards with headroom guarantee
Cross-divider:	Separates pairs for exceptional cable performance
Reduced attenuation:	Maximizes the amount of signal that reaches the receiver and increases bandwidth
Reelex™ packaging:	Enables proper performance and provides quick installation
Tested beyond the standards:	Cable has been characterized to 550 MHz, 300 MHz above the standard
Descending length cable markings:	Easy identification of remaining cable reduces installation time and cable scrap

applications

TX6000 U/UTP Copper Cable is a component of the TX6000 Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future. With certified performance to the ISO 11801 Class E standards and ANSI/TIA-568.2-D Category 6, this system is ideal for today's high performance workstation applications. Usage of the TX6000 Copper Cabling System includes::

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 10GBASE-T (10 Gigabit Ethernet over limited distances as specified in the industry 10GBASE-T standards)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token ring 4/16

TX6000 U/UTP Copper Cable

LSFRZH: PUY6004**-HE


**To designate a colour, add suffix BU (Blue), WH (White), YL (Yellow), IG (International Gray), BL (Black), RD (Red), GR (Green), OR (Orange), or VL (Violet).

TX6000™ Enhanced Category 6 U/UTP Copper Cable

additional specifications

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf)
Minimum Bend Radius	4 x cable diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	67%
Operating Voltage, Maximum	80 V

cable construction

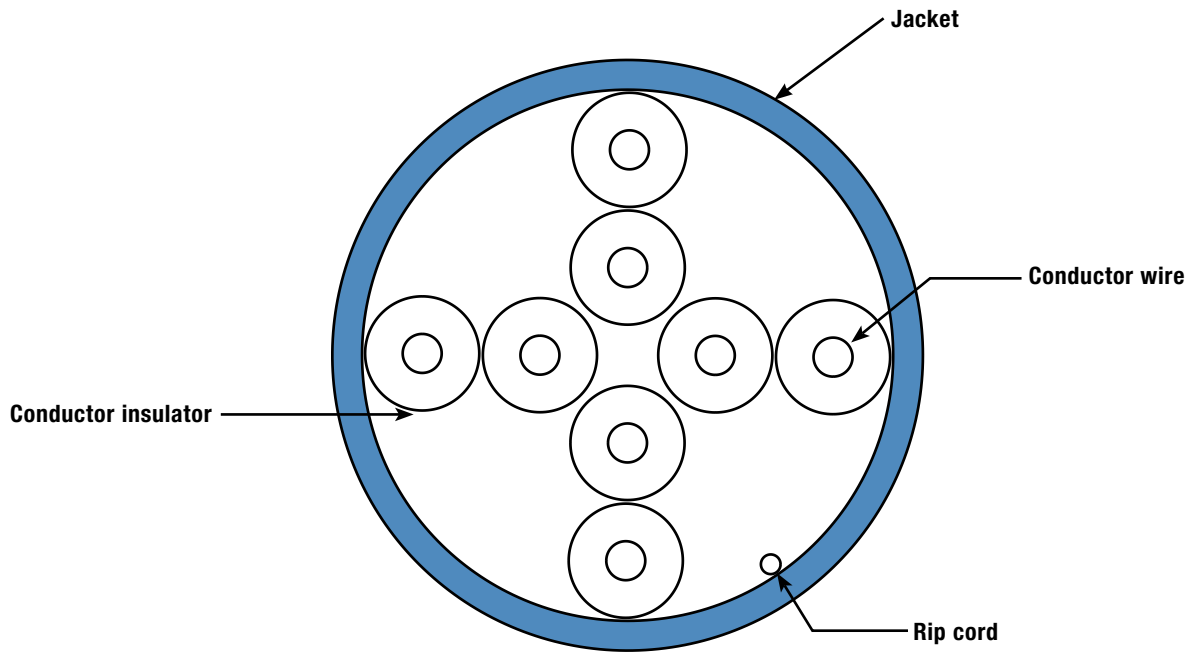

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT™

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

©2023 Panduit Corp.
ALL RIGHTS RESERVED.
COSP508-WW-UKE
3/2023