

TX7000™ Category 7 S/FTP Indoor / Outdoor Copper Cable

Europe

PANDUIT[®]
SPECIFICATION SHEET

SPECIFICATIONS

Category 7 cable shall meet the IEC 61156-5 component standard. The conductors shall be 23 AWG construction with SFS-PO insulation. The copper conductors shall be twisted in pairs with each pair having an individual foil shield, all pairs are surrounded by an overall braid and a flame-retardant LSZH white inner jacket for indoor use. An outer UV-resistant polyethylene (PE) black jacket with PET rip cord renders the cable suitable for outdoor installations.

*Not suitable for direct burial applications. Cable jacket must remain unabraded to avoid water ingress. Water must not be allowed to ingress into the cable ends.



Category 7 S/FTP Copper Cable

LSZH: PSOW7004BL-HED

**Contact customer service for additional colors

TECHNICAL INFORMATION

Electrical performance:	Certified channel performance in a 4-connector configuration up to 100m and exceeds the requirements of ISO 11801 Category 6A Standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the TX6A™ S/FTP Copper Cabling System Certified component performance up to 100m and meets or exceeds the component requirements of the IEC 61156-5 Category 7 standards at swept frequencies up to 600 MHz
PoE compliance:	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
Installation tension:	110 N maximum
Insulation diameters:	1.27mm – 1.30mm
Cable jacket:	Inner jacket Euroclass B2ca-s1a, d1, a1 and outer jacket Euroclass Fca
Cable diameter:	Inner jacket (7.2mm) nominal and outer jacket (9.2mm) nominal
Cable weight:	45 kg/500m nominal
Conductors/insulators:	23 AWG solid copper insulated with SFS-PO
Operating temperature:	-20°C to 60°C
Installation temperature:	0°C to 50°C

KEY FEATURES AND BENEFITS

Wet Location applications:	Intended for installations in below-grade conduit, duct and other wet environments. Refer to installation notes in specification section above
Dry core construction:	No use of gel fillers allowing for cleaner terminations
Robust jacket:	Ensures electrical performance during water submersion
Descending length cable markings:	Easy identification of remaining cable reduces installation time and cable scrap
Easy payout reel:	500m supplied on a reel

APPLICATIONS

Category 7 S/FTP Copper Cable is a component of the TX6A™ S/FTP Copper Cabling System. This end-to-end system provides a cost-effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The Panduit solution helps ensure organizations efficiently and reliably meet their data transmission needs. Usage of the TX6A™ Copper Cabling System include high bandwidth applications within data centers and enterprises such as:


- 10GBASE-T Ethernet

TX7000™ Category 7 S/FTP Indoor / Outdoor Copper Cable

ADDITIONAL SPECIFICATIONS

Mechanical Testing	
Ultimate Breaking Strength	>400N
Minimum Bend Radius	Dynamic 12xcable diameter
	Static 8xcable diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	76% nominal

ENGINEERING DRAWING

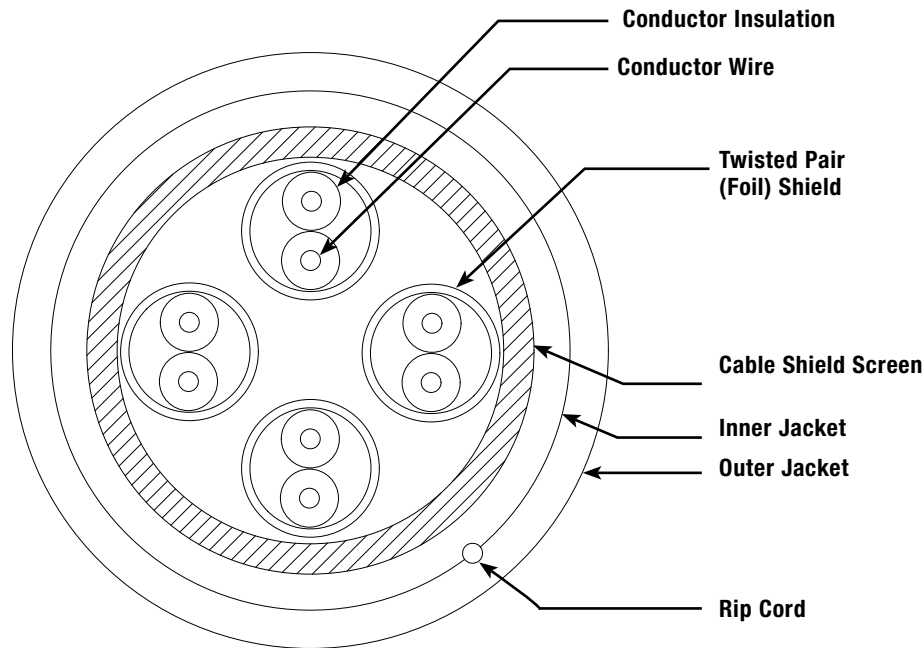

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2023 Panduit Corp.
ALL RIGHTS RESERVED.
COSP574-WW-ENG
11/2023