

TX6A™ Category 6A Shielded F/FTP Copper Cable

PANDUIT®

PRODUCT INFO

specifications

Category 6A cable shall be constructed of 23 AWG copper conductors with SFS-PO insulation. The copper conductors shall be twisted in pairs, with each pair covered in foil. All four pairs shall be surrounded by an overall metallic foil shield within a LSFRZH jacket.



technical information

Part number	PFFL6X04**-HED (** designates jacket color, WH = white)
Electrical performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ISO 11801 Class Ea and ANSI/TIA-568-C.2 Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ 10Gig™ Shielded Copper Cabling System Certified component performance up to 100 meters and meets or exceeds the component requirement of the IEC 61156-5 and ANSI/TIA-568-C.2 Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems
Conductors/insulators:	23 AWG solid copper insulated with SFS-PO
CPR compliance:	IEC 60332-1, IEC 60754, IEC 61034, EN 50575: Euroclass Dca-s2-d2-a1
Installation tension:	110 N (25 lbf)
Temperature rating:	0°C to 60°C (32°F to 140°F) during operation
Cable jacket:	LSZH
Cable diameter:	7.3 mm (0.287 in.) nominal
Cable weight:	26kg/500m (57 lbs./1000 ft)
Packaging:	500m (1640 ft.) on reel

key features and benefits

Foiled Individual pairs:	Shielded pairs for exceptional cable performance
Overall foil shield:	Provides superior structural integrity and reduces low interference, including alien crosstalk to ensure exceptional cable performance at all swept frequencies up to 500 MHz
Internal drain wire:	Facilitates means of grounding the cable and provides for efficient performance and protection of network investment
Descending length cable markings:	Easy identification of remaining cable reduces installation time and cable scrap
Easy payout reel:	500m (1640 ft.) supplied on a reel


applications

TX6A™ 10Gig™ Shielded Copper Cable is a component of the Panduit® TX6A™ 10Gig™ Shielded Copper Cabling System. This end-to-end system provides a cost-effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The shielded cabling system provides high performance, excellent EMI suppression, and aids in secure data transmission. The Panduit solution helps ensure organizations efficiently and reliably meet their data transmission needs. Usage of the TX6A™ 10Gig™ Shielded Copper Cabling System include high bandwidth applications within data centers and connections to high-end workstations such as:

- 10GBASE-T Ethernet
- Data Center applications
- Virtual business management applications

TK6A™ Category 6A Shielded F/FTP Copper Cable

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf)
Minimum Bend Radius	8 x Cable Diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	76% nominal

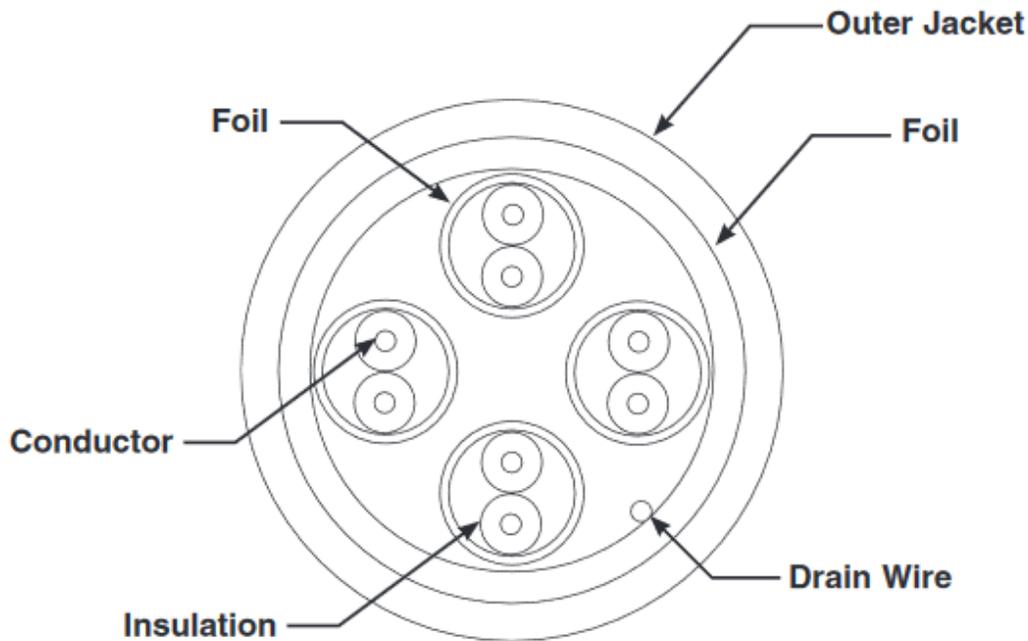

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300

PANDUIT®