




# Volition™ 500 MHz 10 Gigabit Cable

## Category 6a U/FTP LSOH

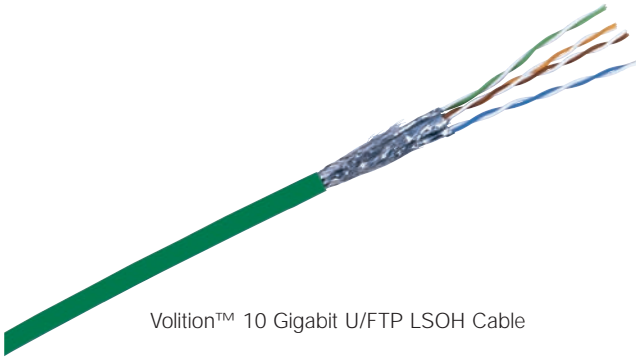

Volition™ 10 Gigabit U/FTP LSOH Cable

Volition™ 10 Gigabit cables are specially designed to ensure total immunity to alien crosstalk to 500 MHz. They were developed to exceed the requirements of the 6 around 1 test, that is, the Powersum of ANEXT effects generated by 6 cables (or 24 pairs) on one pair of an adjacent cable.

All constructions of 10 Gigabit Volition™ cables have general shielding and/or shielding by pair. Volition™ 10 Gigabit cables have unequalled immunity against AXTLK.

Volition™ 10 Gigabit cables allow easy installation, with no particular precautions, thanks to their round shape. Connection to Volition™ OCK10S8 jack remains simple and natural. Cable laying is easy thanks to the external diameter of the cable, which is the same as the Volition™ Category 6/Class E 250MHz cable. Volition™ 10 Gigabit cables are available in LSOH versions

### Standards

#### Applications

- Ethernet IEEE 802.3
- FDDI
- ATM
- RNIS

#### Cabling standards

- EN 50173
- ISO/IEC 11801
- TIA/EIA 568
- EN 50188-10 (draft)
- IEC 61156-5 Ed 2 (draft)

#### Environmental standards

- Fire resistance IEC 60332-1 Cat. C2
- Low smoke emission IEC 61034
- Toxicity/Corrosion IEC 60754-1/-2

---

### Features

- Alien crosstalk immunity certified up to 500MHz
- Aluminium/Polyester screen
- Length printed on the cable sheath
- LSOH sheath, IEC 60332-1 Category C2 type

### Benefits

- Excellent electrical performance for 10 Gigabit Ethernet
- Ensure the effects of alien crosstalk are reduced
- Simplified Installation
- Excellent fire resistance


# Technical Specification

## Electrical characteristics at 20° C:

Conductor resistance (max.)	≤ 146,4 Ω /km
Insulation resistance (min)	≥ 5000 MΩ/km
Dielectric strength at 50Hz	1 KV / 1 min
Unbalanced capacitance - pair to ground (max)	≤ 1600 pF / 500 km
Propagation velocity (NVP)	78%
Characteristic impedance at 100 MHz	100 ± 5 Ω

## Mechanical installation characteristics

Minimum bend radius	≥ 65 mm
Maximum pulling tension	≥ 35 mm
Nominal weight	78 (4p) and 156 (2x4p)
Temperature characteristics (°C)	
Transport / storage	0 to +50°C
Operating temperature	-20 to +60°C

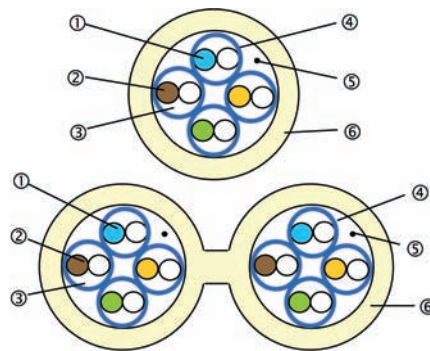

Cable construction  
 1- Conductor diameter: 23 AWG  
 2- Insulation: Pe diameter 1,45 mm  
 3- Cable assembly: pair  
 Number of pairs: 4 or 8 (2x4)  
 4- Individual screen around each pair: Alu/Polyester tape  
 5- Drain wire  
 6- Sheath material: LSOH

# Electrical performance

Frequency (MHz)		4	10	20	62,5	100	250	500	550**
<b>Attenuation (max)</b>	Typical value	3,6	5,6	8	14,2	18,1	28,9	41,2	43,5
<b>(dB/100 m)</b>	Cat 6A* (min.)	3,8	5,9	8,4	15	19,1	31,1	45,3	-
<b>NEXT</b>	Typical value	90	90	82	75	72	65	60	59
<b>(dB)</b>	Cat 6A* (min.)	65,3	59,3	54,8	47,4	44,3	38,3	33,8	-
<b>PSNEXT</b>	Typical value	87	87	79	72	69	62	57	56
<b>(dB)</b>	Cat 6A* (min.)	63,3	57,3	52,8	45,4	42,3	36,3	31,8	-
<b>ELFEXT</b>	Typical value	80	80	77	71	67	52	46	45
<b>(dB)</b>	Cat 6A* (min.)	58	50	44	34,1	30	22	16	-
<b>PS ELFEXT</b>	Typical value	77	77	74	68	64	49	43	42
<b>(dB)</b>	Cat 6A* (min.)	55	47	41	31,1	27	19	13	-
<b>Return Loss</b>	Typical value	25	26	26	23	22	19	16,7	16
<b>(dB)</b>	Cat 6A* (min.)	23	25	25	21,5	20,1	17,3	15,2	-
<b>PS ANEXT</b>	Typical value	85	85	85	85	80	73	68	67
<b>(dB)</b>	Cat 6A* (min.)	76,5	72,5	69,5	64,5	62,5	56,5	52	-

\* Category 6a acc. Draft IEC 61156-5 Ed.2  
 \*\* Only for information

## Ordering Information



**Volition™ Category 6a U/FTP 100 Ohms LSOH**  
 4 pairs Length: 1000 m Unit: 1 drum Weight: 63 Kg

**VOL6AUFL41000**

**Volition™ Category 6a U/FTP 100 Ohm LSOH**  
 2x4 pairs Length: 500 m Unit: 1 drum Weight: 63 Kg

**VOL6AUFL8500**

**3M and Volition are trademarks of 3M. Quante is a trademark of Quante AG.**

### Important Notice

All questions of liability relating to this product are governed by our Terms of Sale subject where applicable to the prevailing law.



### 3M Telecommunications

Europe, Middle East & North Africa  
 c/o Quante AG  
 Carl-Schurz-Straße 1 · 41453 Neuss · Germany

Tel.: ++49 (0)2131 / 14-5999  
 Fax: ++49 (0)2131 / 14-5998  
 Internet: www.3MTelecommunications.com