



Volition™ 10 Gigabit Cable

Category 7, S/FTP, LSOH

Volition™ 10 Gigabit cables are specially designed to ensure total immunity to alien crosstalk to 500 MHz. They were developed to exceed the requirements of the 6 around 1 test, that is, the Powersum of ANEXT effects generated by 6 cables (or 24 pairs) on one pair of an adjacent cable.

All constructions of 10 Gigabit Volition™ cables have general shielding and/or shielding by pair. Volition™ 10 Gigabit cables have unequalled immunity against AXTLK.

Volition™ 10 Gigabit cables allow easy installation, with no particular precautions, thanks to their round shape. Connection to Volition™ OCK10S8 jack remains simple and natural. Cable laying is easy thanks to the external diameter of the cable, which is the same as the Volition™ Category 6/Class E 250MHz cable. Volition™ 10 Gigabit cables are available in LSOH versions

Applications

- IEEE 802.3-IEEE 802.5
- FDDI
- ATM
- RNIS

Cabling Standards

- EN 50173
- ISO/IEC 11801
TIA/EIA 568
- EN 50188-10 (draft)
- IEC 61156-5 Ed 2 (draft)

Environmental Standards

- Fire resistance IEC 60332-1 Cat. C2
- Low smoke emission IEC 61034
- Toxicity/Corrosion IEC 60754-1/-2

Features

- Screening by pair in aluminium/polyester
- Length printed on the cable sheath
- LSOH sheath, IEC 60332-1 Category C2 type
- Round shape

Benefits

- Alien crosstalk immunity certified up to 500MHz
- Simplified Installation
- Complies with public building requirements
- Easy to connect on RJ45 OCK10S8


Technical Specification

Electrical characteristics at 20° C:

Conductor resistance (max.)	≤ 146,4 Ω /km
Insulation resistance (min)	≥ 5000 MΩ/km
Dielectric strength at 50Hz	1 KV / 1 min
Unbalanced capacitance - pair to ground (max)	≤ 1600 pF / 500 km
Propagation velocity (NVP)	78%
Characteristic impedance at 100 MHz	100 ± 5 Ω

Mechanical installation characteristics

Minimum bend radius at installation	≥ 65 mm
Minimum bend radius once installed	≥ 35 mm
Maximum pulling tension	78 (4p) and 156 (2x4p)
Nominal weight	51 kg/km
Temperature characteristics (°C)	
Transport / storage	0 to +50°C
Operating temperature	-20 to +60°C

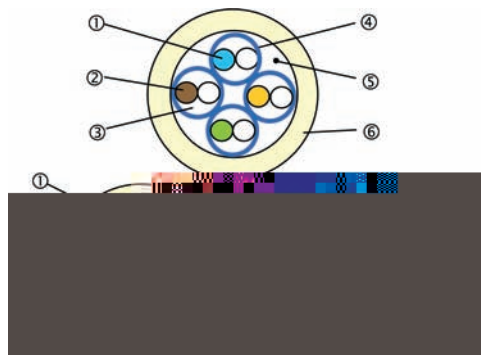

Cable construction
 1- Conductor diameter: 23 AWG (0,560mm)
 2- Insulation: Pe diameter 1,45 mm
 3- Cable assembly: pair
 Number of pairs: 4 or 8 (2x4)
 4- Individual screen around each pair: Alu/Polyester tape
 5- Drain wire
 6- Sheath material: LSOH

Electrical performance

Frequency (MHz)		4	10	20	62,5	100	250	500	550**
Attenuation (max)	Typical value	3,6	5,6	8	14,2	18,1	28,9	41,2	43,5
(dB/100 m)	Cat 7* (min.)	3,8	5,9	8,4	15	19,1	31,1	45,3	-
NEXT	Typical value	90	90	82	75	72	65	60	59
(dB)	Cat 7* (min.)	65,3	59,3	54,8	47,4	44,3	38,3	33,8	-
PSNEXT	Typical value	87	87	79	72	69	62	57	56
(dB)	Cat 7* (min.)	63,3	57,3	52,8	45,4	42,3	36,3	31,8	-
ELFEXT	Typical value	80	80	77	71	67	52	46	45
(dB)	Cat 7* (min.)	58	50	44	34,1	30	22	16	-
PS ELFEXT	Typical value	77	77	74	68	64	49	43	42
(dB)	Cat 7* (min.)	55	47	41	31,1	27	19	13	-
Return Loss	Typical value	25	26	26	23	22	19	16,7	16
(dB)	Cat 7* (min.)	23	25	25	21,5	20,1	17,3	15,2	-
PS ANEXT	Typical value	85	85	85	85	80	73	68	67
(dB)	Cat 77* (min.)	76,5	72,5	69,5	64,5	62,5	56,5	52	-

* Category 7 acc. Draft IEC 61156-5 Ed.2
 ** Only for information

Ordering Information

Ref.-No.



3M™ Volition™ Cable 10G S/ FTP 100 Ohm LSOH 
 4 pairs Length: 1000 m Unit: 1 drum Weight: 72,02 Kg

VOL-10SFL4-1000

3M™ Volition™ Cable 10G S/ FTP 100 Ohm LSOH 
 2x4 pairs Length: 500 m Unit: 1 drum Weight: 75 Kg

VOL-10SFL8-500

3M and Volition are trademarks of 3M. Quante is a trademark of Quante AG.

Important Notice

All questions of liability relating to this product are governed by our Terms of Sale subject where applicable to the prevailing law.



3M Telecommunications

Europe, Middle East & Africa
 c/o 3M Deutschland GmbH
 Carl-Schurz-Straße 1 · 41453 Neuss · Germany

Tel.: ++49 (0)2131 / 14-5999
 Fax: ++49 (0)2131 / 14-5998
 Internet: www.3MTelecommunications.com