


# DATASHEET

## Connecting module Cat.6 250MHz with IDC - terminal

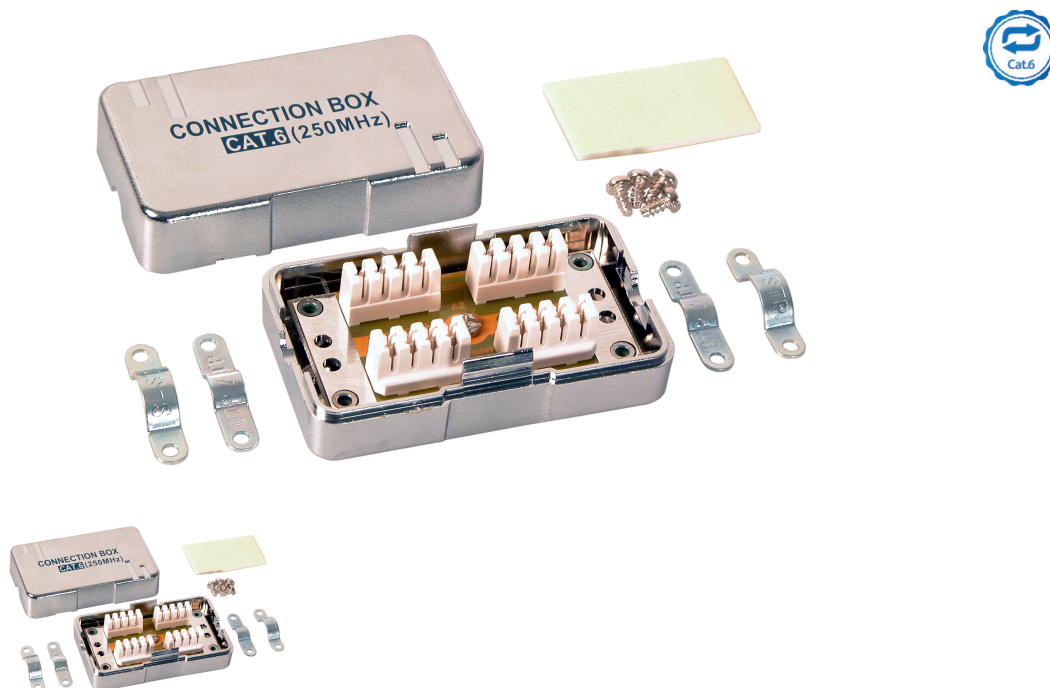

### General data

Cat.6 connection module up to 250 MHz with IDC-terminals. The connecting module can be used to extend installation cables or reconnect damaged cables without having to install a complete cable segment.

With adhesive tapes for fixing

Screw-type strain relief

Cable entry up to 7.5 mm

### Accessory

Screw-type strain relief (M3x12)

Cable inlet (4 x )

With adhesive tapes for fixing

### Technical properties

360° shield contact	True
AWG-range	26 - 22
Cable diameter	10.0 mm
Casing material	Plastic
Category	6
Complaint to UL94	V-0
Connection type	Insulation displacement connector
Contact Resistance	≤ 20 mΩ

This datasheet was created automatically on 24-06-2026 . Technical changes reserved.



# DATASHEET

## Connecting module Cat.6 250MHz with IDC - terminal

Current capacity	1.5 A
Dielectric Withstanding Voltage	1000 V AC 60Hz
Dust cover	false
For UAE suitable	False
Insulation Resistance	≥ 500 MΩ
Model	connector
Screened	True
Shield contact and strain relief separate	False
Special tool necessary	False
Suitable for degree of protection (IP)	IP20
Suitable for flat cable	False
Suitable for litz wire conductor	False
Suitable for round cable	True
Suitable for solid core	True
Type of locking	Screw lock

### Available variants

ArtNr.	Bezeichnung	Color
37596.2	Connecting module Cat.6 250MHz with IDC - terminal	silver

This datasheet was created automatically on 24-06-2026 . Technical changes reserved.

