

Everon® Copper Datacom S/FTP 1500/22, Category 7A+, LSZH/FRNC, Dca 4P, Blue

CORNING

Part Number: CCXFCB-M0047-C001-L7

The Everon® Copper Datacom S/FTP 1500/22 cable is designed up to 1600MHz and its transmission characteristics exceed Category 7A+ specifications according to EN50288-9-1 IEC 61156-5 and IEC61156-7. High system margins for the complete link according to the last version of ISO/IEC 11801 and EN 50173 (Series) will be achieved by using corresponding hardware together with this highend copper cable. Due to the very low delay skew between the pairs these Everon® cables are especially suitable for Gigabit Ethernet and also for transmission of digital data for future applications up to 10 Gigabit Ethernet according to IEEE 802.3an. The cable has a streamlined construction and low weight. Overall shielding with tinned copper wire braiding and each twisted pair is individually shielded with a Allaminated foil (S/FTP). The cable satisfies Class B interference radiation standards according to EN 55022, as well as immunity according to EN 55024, which enables the realisation of CE-compatible networks.

Features and Benefits

S/FTP 1500/22 cable designed up to 1600 MHz

Fulfills all requirements of category 7A+ EN50288-9-1 and IEC 61156-5 and IEC61156-7

Suitable for Classe D to FA according to ISO/IEC 11801. EN50173 and 10 Gigabit Ethernet according to IEEE 802.3an


Tested and approved for Power over Ethernet applications (PoE/PoE+/4PPoE) according to IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt up to 90W

Certified by a vendor-independent and impartial test lab


Flame retardant and non corrosive (FRNC), Low smoke and halogen-free (LSZH)

Overall shielding with tinned copper wire braiding and each twisted pair is individually shielded with a Allaminated foil (S/FTP)

Length marking on jacket

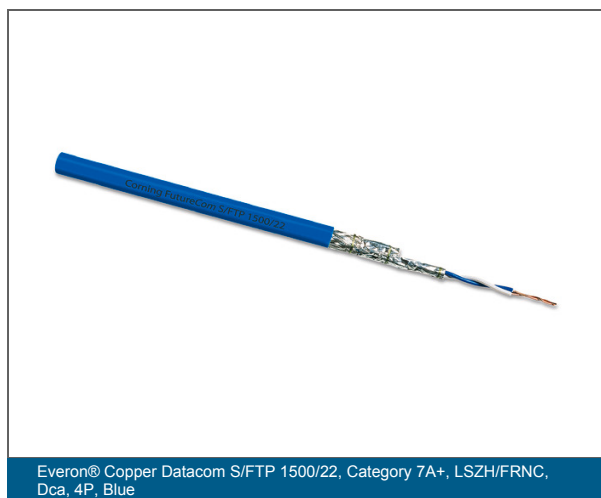

Everon® Copper Datacom S/FTP 1500/22, Category 7A+, LSZH/FRNC, Dca, 4P, Blue

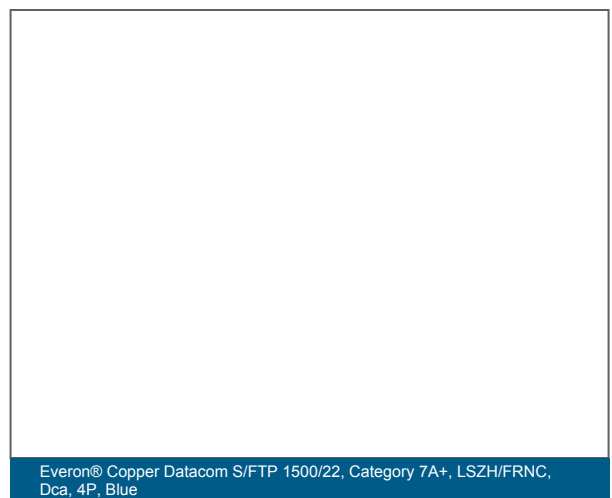

Everon® Copper Datacom S/FTP 1500/22, Category 7A+, LSZH/FRNC, Dca, 4P, Blue

Everon® Copper Datacom S/FTP 1500/22, Category 7A+, LSZH/FRNC, Dca 4P, Blue

CORNING

Specifications

General Specifications

Category	7A+
Cable type	S/FTP
Halogen-free	Yes
Construction	Simplex, 4P
Reaction to Fire	Dca, s2, d2, a1
Legacy Part Number	CCXFCB-M0047-C001-L7
Brand	Everon

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	IEC 61156-5, EN 50288-9-1, ISO/IEC 11801 Ed. 2.2, EN 50173-1, ANSI/TIA-568-C.2, IEC 60304
Design And Test Criteria	Tested and approved for Power over Ethernet applications (PoE/PoE+/4PPoE) according to IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt up to 90W
Flame propagation test	IEC 60332-1; IEC 60332-3-24
Smoke density	IEC 61034-2
Halogen content test	Zero Halogen to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2

Environmental Conditions

Halogen-free	Yes
Temperature range, installation	0 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C

Cable Design

Conductor	Copper Wire, AWG 22/1
-----------	-----------------------

Everon® Copper Datacom S/FTP 1500/22, Category 7A+, LSZH/FRNC, Dca 4P, Blue

CORNING

Cable Design

Conductor insulation	Halogen-free foam-skin material
Twisting	2 cores to a pair
Pair screen	Al-laminated foil around each pair
Overall screen	Copper braid, tinned
Outer jacket material	LSZH/FRNC
Outer jacket colour	Blue

Mechanical Characteristics

Fire load	660 MJ/km
Nominal outer diameter	7.7 mm
Min. bend radius installation	8x Cable-Ø
Min. bend radius operation	3x Cable-Ø (over flat side)
Maximum tensile strength	179 N

Electrical Characteristics

Surface Transfer Impedance	< 2 mΩ/m at 10 MHz
Conductor resistance unbalance	1 %
Delay skew	6 ns/100 m
Max. loop resistance	118 Ω/km
Propagation delay	4.2 ns/m
Voltage rating	Less than 75 V DC max and less than 50 V ACC max
Propagation velocity at >10 MHz (NVP*c)	0.76 %
Coupling attenuation	90 dB
Segregation Class	d
Insulation Resistance	> 5000 MΩ*km

Dimensions

Weight	66 kg
--------	-------

Everon® Copper Datacom S/FTP 1500/22, Category 7A+, LSZH/FRNC, Dca 4P, Blue

CORNING

Ordering Information

Product Number	CCXFCB-M0047-C001-L7
Cable length	1000 m
Packaging method	Drum
Units per delivery	1/1

Electrical Characteristics

Frequency [MHz]	1	4	10	100	300	600	1000	1200	1500	1600
Attenuation according to Standard		3.5	5.4	17.5	31.5	46.3	62.0	69.0		
Typical attenuation [db/100m]	1.6	3.1	4.2	14.4	28.0	37.7	49.0	54.9	62.0	66.0
NEXT according to Standard		78.0	78.0	76.0	69.0	64.0	61.0	60.0		
Typical NEXT Values [db/100m]	110.0	110.0	110.0	110.0	105.0	100.0	92.0	88.0	80.0	74.0
ACR-N according to Standard		74.5	72.6	58.5	37.5	17.7				
Typical ACR-N Values [db/100m]	108.4	106.9	105.8	95.6	77.0	62.3	43.0	33.1	18.0	8.0



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
00 800 2676 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.