

Everon® Copper Datacom Terminal Outlet VOL and Keystone Adapter, inclined, 45x45 mm, for 2 VOL or Keystone module, white

CORNING

Part Number:
UAXCSE-V0201-C030-BP

The Everon® Copper Datacom offers connectivity solutions for various types of installations (Panel, terminal outlets, consolidation points...). The same reference of module can be used for all supporting frame to facilitate the maintenance. The dust protection is already provided with our module.

There are one design for boths footprints VOL and Keystone RJ45 modules. As the adapter is compatible with both footprint, you reduce the number of various components.

Adapter, blank cover, face plate, back box are available to configure outlets.

Features and Benefits

Both footprints VOL and Keystone are supported

Easy mounting of modules



Easy assembling and removing adapter to the frame

Area dedicated to label port identifier

No special tools required for installation

Standard white color for all terminal solution

Angled adaptor reduce the tensile on the patchcord and the cable

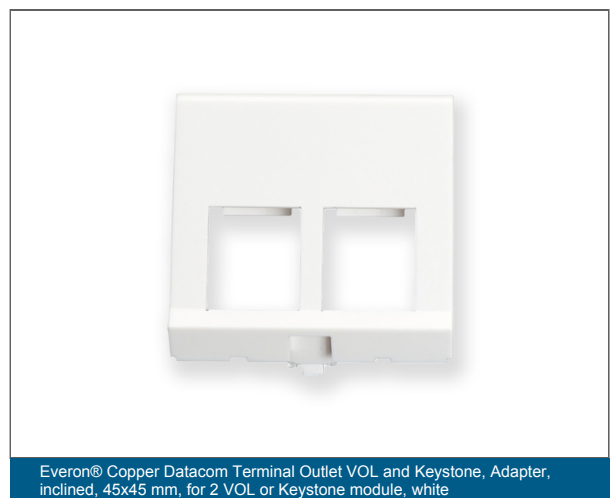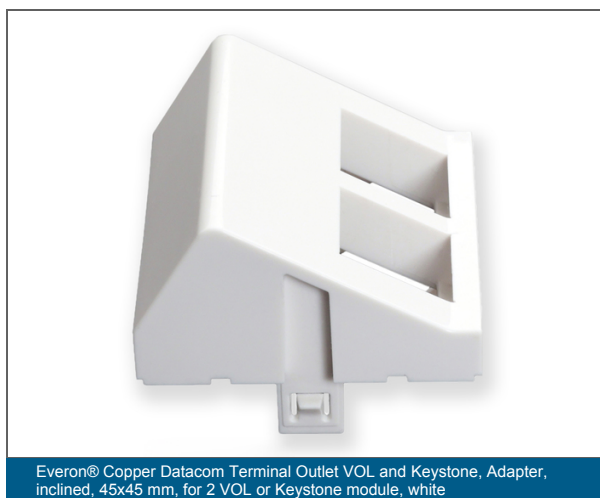

Everon® Copper Datacom Terminal Outlet VOL and Keystone Adapter, inclined, 45x45 mm, for 2 VOL or Keystone module, white

CORNING

Specifications

General Specifications

Product category	Core product
------------------	--------------

Standards

Flame retardance	Class UL94 V-0
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Environmental Conditions

Environmental compatibility	Recyclable and free of heavy metal
Halogen-free	Yes
Temperature range, installation	0 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C

Design

Number of Pieces	1
Colour	White, RAL 9010
Number of ports	2

Mechanical Specifications

Reproducibility	Several times reusable
-----------------	------------------------

Dimensions

Height	45 mm
Width	45 mm
Depth	45 mm

Everon® Copper Datacom Terminal Outlet VOL and Keystone Adapter, inclined, 45x45 mm, for 2 VOL or Keystone module, white

CORNING

Ordering Information

Product Number	UAXCSE-V0201-C030-BP
Shipping weight	11 g
Units per delivery	24/1



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
00 800 2676 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.