

Everon® Copper Datacom Class D Patch Cord, 2xRJ45, Cat.5e, U/UTP LSZH AWG 26 gray, 1 m

CORNING

Part Number:
CCADGE-B1002-A010-C0

The application-neutral Everon® Copper Datacom category 5e patch cords are unshielded (U/UTP). They are assembled with unshielded RJ45 connectors on each end. The zero halogen patch cords (LSZH) are non-corrosive according to IEC 60754-2 (FRNC), low smoke according to IEC 61034 and flame retardant according to IEC 60332-1. Everon Copper Datacom CCADGE patch cords provide additional latch protection. They are available in various lengths and colors.

Features and Benefits


Application-neutral due to using all four pairs of RJ45 connectors

Additional latch protection

Category 5 / 5e

Supports Power over Ethernet (PoE / PoE+ / PoE++). IEEE 802.3bt-2018 performance (4PPoE) Ready for new applications powered on 4 pairs up to 90W

Supports Power over Ethernet (PoE / PoE+) according IEEE 802.3at

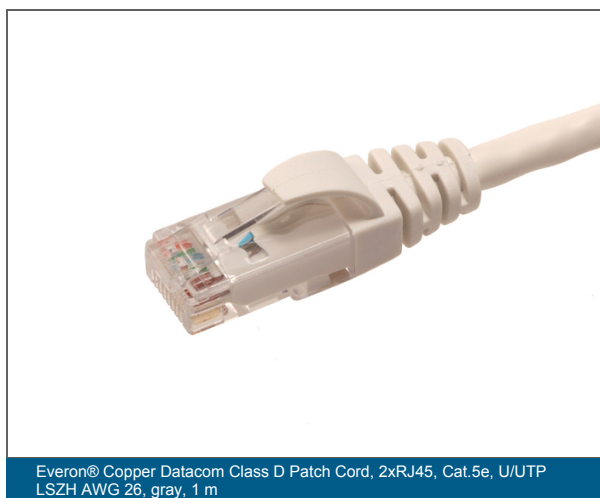

Everon® Copper Datacom Class D Patch Cord, 2xRJ45, Cat.5e, U/UTP LSZH AWG 26, gray, 1 m

Everon® Copper Datacom Class D Patch Cord, 2xRJ45, Cat.5e, U/UTP LSZH AWG 26 gray, 1 m

CORNING

Specifications

General Specifications

Area/Range of Application	10Base-T; 100Base-TX; 1000Base-T/155; 622Mb/sATM
Cable Assembly Type	Patch Cords
Environment	Indoor
Category	5e
Cable Type	U/UTP
Halogen-free	Yes
Legacy Part Number	VOL-5EUDL
Brand	Everon®

Standards

Flame Retardance	Flame retardant according to IEC 60332-1-2 (single cable)
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Design and Test Criteria	Compliant with PoE / PoE++ IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt
Halogen content test	Low smoke according to IEC 61034
Level of corrosion	Non-corrosive according to IEC 60754-2

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C (32 °F to 122 °F)
Temperature Range, Operation	-20 °C to 60 °C (-4 °F to 140 °F)
Transport and Indoor Storage	Dry environment, no direct sunlight, room temperature ≤ 40 °C

Cable Design

Twisting	2 cores to a pair
Outer Jacket Material	LSZH/FRNC
Outer Jacket Color	Gray

Everon® Copper Datacom Class D Patch Cord, 2xRJ45, Cat.5e, U/UTP LSZH AWG 26 gray, 1 m

CORNING

Cable Design

Outer Diameter	4.2 mm
----------------	--------

Mechanical Specifications

Fire Load	0.3 MJ/m
Min. Bend Radius Installation	34 mm

Specifications - Connector A

Connector Type	RJ45 - 8/8
Durability Cycles	750 N/A
Connector Material	Pin gold plated 50µ inch

Specifications - Connector B

Connector Type	RJ45 - 8/8
Durability Cycles	750 N/A
Connector Material	Pin gold plated 50µ inch

Electrical Specifications

Mutual capacity	1600 pF/km
Max. loop resistance	150 Ω/km
Propagation delay	5.38 ns/m at 100 MHz
DC resistance unbalance	5 %
Insulation Resistance	500 MΩ*km
Impedance Zo at 1-100 MHz	100 Ω ± 5% at 100 MHz

Dimensions

Length	1 m
--------	-----

Everon® Copper Datacom Class D Patch Cord,
2xRJ45, Cat.5e, U/UTP LSZH AWG 26 gray, 1 m



Dimensions	
Weight	0.03 kg

Ordering Information	
Product Number	CCADGE-B1002-A010-C0
EAN Code	4064394123659
Packaging Method	Corn Starch Bag
Shipping Weight	0.04 kg
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2025 Corning Optical Communications. All rights reserved.