

ALTOS® Loose Tube Outdoor Duct Cable LT

2.3 8x12 E9 SMF-28e+® ITU G652.D

CORNING

Part Number:
096ER4-T3122A20

Corning stranded loose tube cables are designed for outdoor use for campus, city and intercity backbones in duct installations.

The loose tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The buffer tubes and fibers in each tube are color coded for quick and easy identification.

The SZ-stranded construction further reduces installation and environmental influences on the transmission parameters and allows mid-span access.

These cables are designed for installation in conduits, ducts and on cable racks.

Features and Benefits

All-dielectric cable construction

Requires no grounding or bonding

UV- and microbe-resistant

Can be installed in ducts or conduits

Waterblocking technology



OSP (outdoor) applications

Fibres/buffer tubes colour coded to Telcordia-Bellcore

Easy identification of the individual tubes and fibres

Dry cable core by means of water swellable elements

Allows efficient and craft-friendly cable preparation in outdoor applications

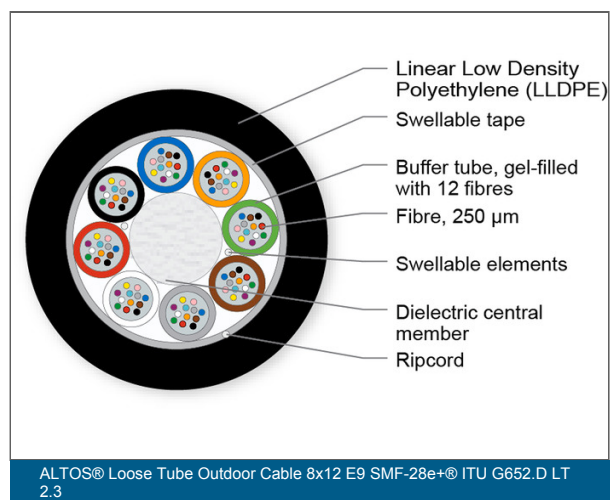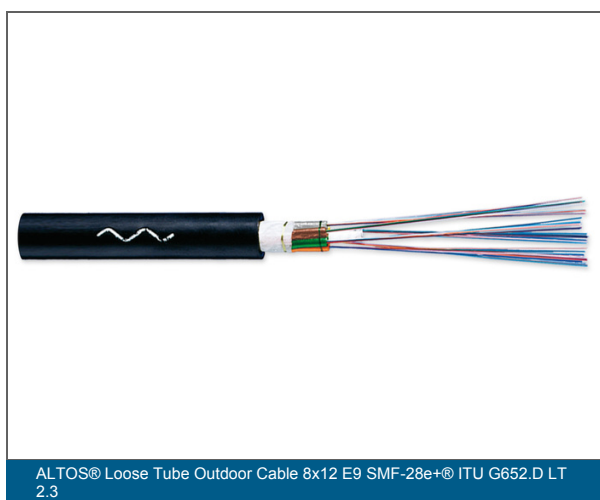

ALTOS® Loose Tube Outdoor Duct Cable LT 2.3 8x12 E9 SMF-28e+® ITU G652.D

CORNING

Specifications

General Specifications

Cable type	Loose tube
Environment	Outdoor
Product type	Dielectric
Fibre category	Single-mode (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	A-DQ(ZN)2Y
Application	Duct
Cable geometry	Round

Standards

Fibre Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-2 F5

Environmental Conditions

Temperature range, installation	-5 °C to 50 °C
Temperature range, operation	-30 °C to 70 °C
Temperature range, storage	-40 °C to 70 °C

Cable Design

Cable marking	Metre - Handset - Sine - CORNING - Year -ALTOS (R) A-DQ(ZN)2Y 8X12 E9 LT 2.3
Central element	Dielectric with Polyethylene coating
Fibre count	96
Number of ripcords	1
Outer jacket colour	Black
Outer jacket material	Linear Low Density Polyethylene (LLDPE)

ALTOS® Loose Tube Outdoor Duct Cable LT

2.3 8x12 E9 SMF-28e+® ITU G652.D

CORNING

Cable Design

Outer jacket nominal thickness	1.5 mm
Buffer tube colour	Blue, orange, green, brown, grey, white, red, black
Buffer tube diameter	2.25 mm
Central element diameter	3.9 mm
Number of active tubes	8
Number of tube positions	8
Tape	Water-swellaable
Fibre colouring	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
Fibres per tube	12
Colour Code Standards	Telcordia

Mechanical Specifications

Crush resistance	2000 N/10 cm
Max. tensile strength for installation	2700 N
Min. bend radius installation	210 mm
Min. bend radius operation	180 mm
Nominal outer diameter	11.9 mm

Optical Characteristics

Fibre code	E
Performance option code	22
Fibre category	OS2
Fibre Type	Single-mode (OS2) / 250 µm
Fibre name	Single-mode (OS2)
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fibre compliance	ITU-T G.652.D
Fibre core diameter	8.2 µm

ALTOS® Loose Tube Outdoor Duct Cable LT 2.3 8x12 E9 SMF-28e+® ITU G652.D

CORNING

Optical Characteristics

Cladding diameter	125 µm
Coating diameter	242 µm
Dispersion @ 1550 nm	≤ 18 [ps/(nm*km)]
Dispersion @ 1625 nm	≤ 22 [ps/(nm*km)]
Cable cutoff wavelength	1260 nm
Mode-Field Diameter at 1310 nm	9.2 µm
Mode-Field Diameter at 1550 nm	10.4 µm
PMD Link Design Value	≤ 0.06 ps/(nm*km)
PMD (Polarization Mode Dispersion) maximum individual fibre	≤ 0.1 ps/(nm*km)

Dimensions

Cable Weight	113 kg/km
Max. cable length per reel/drum	6000 m



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2025 Corning Optical Communications. All rights reserved.