

Central Tube Dielectric Armor Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM4 CT 3.0

CORNING

Part Number:
004TEU-13198A2G

The central tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibers in are color coded for quick, easy identification. Based on a central buffer tube cable construction, is very compact, light and flexible, and ideal for connections requiring a moderate fiber count. These cables are designed for installation in conduits, ducts and in-house.

Features and Benefits

All-dielectric construction

Requires no grounding or bonding

Laminated swelling glass yarns

Improved rodent resistance and longitudinal water protection

UV- and microbe-resistant

Can be installed in ducts or conduits

Small diameter and bend radius

Easy installation in space-constrained areas

Fibers color coding to Telcordia-Bellcore

Easy identification of the individual fibers

Waterblocking technology


OSP (outdoor) applications

Silicon-free outer jacket

The cable jacket is free of harmful to paint structures

Flame retardant

LSZH/FRNC

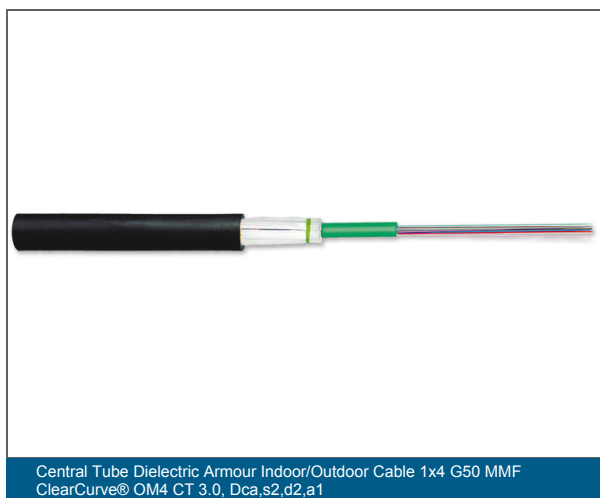

Central Tube Dielectric Armour Indoor/Outdoor Cable 1x4 G50 MMF
ClearCurve® OM4 CT 3.0, Dca,s2,d2,a1

Central Tube Dielectric Armor Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM4 CT 3.0

CORNING

Specifications

General Specifications

Cable Type	Single Tube
Environment	Indoor/Outdoor
Product Type	Dielectric armor
Fiber Category	50 µm MM (OM4)
Flame Rating	LSZH/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)BH
Application	Duct, General purpose, Horizontal, Vertical Riser
Cable geometry	Round

Standards

Reaction to Fire	Dca, s2, d2, a1
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-22 Method F5B
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable) and IEC 60332-3-24 (bunch of cables)
Reaction to Fire Requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low smoke according to IEC 61034
Halogen content test	Zero Halogen according to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2

Environmental Conditions

Temperature Range, Installation	-5 °C to 50 °C (23 °F to 122 °F)
Temperature Range, Operation	-20 °C to 60 °C (-4 °F to 140 °F)
Temperature Range, Storage	-25 °C to 70 °C (-13 °F to 158 °F)

Central Tube Dielectric Armor Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM4 CT 3.0

CORNING

Cable Design

Cable Marking	Meter - Handset - CE 17 EN 50575 Dca,s2,d2,a1 - Sine - CORNING - Fiber Optic Cable - Year - U-DQ(ZN)BH 4 OM4CC CT 3.0 LSZH(TM)/FRNC
Fiber Count	4
Number of Ripcords	1
Outer Jacket Color	Black
Outer Jacket Material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer Jacket Nominal Thickness	1.2 mm
Tensile Strength Elements and/or Armoring - Layer 1	Laminated swelling glass yarn armor
Buffer Tube Diameter	3 mm
Fiber Coloring	Blue, Orange, Green, Brown
Fibers per Tube	4

Mechanical Specifications

Crush Resistance	1500 N/10 cm
Max. Tensile Strength for Installation	1000 N
Min. Bend Radius Installation	130 mm
Min. Bend Radius Operation	100 mm
Nominal Outer Diameter	6.6 mm

Optical Characteristics

Fiber Code	T
Fiber Name	G50/125 ULTRA-BEND 7.5
Fiber Type	Multimode
Fiber Compliance	IEC 60793-2-10
Performance Option Code	98
Fiber Core Diameter	50 µm
Cladding diameter	125 µm
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -

Central Tube Dielectric Armor Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM4 CT 3.0

CORNING

Optical Characteristics

Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Wavelengths	850 nm / 1300 nm
Coating diameter	242 µm
Fiber Category	OM4

Dimensions

Cable Weight	46 kg/km
Max. cable length per reel/drum	4000 m



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2025 Corning Optical Communications. All rights reserved.