

Basic Fiber Optic Pigtail Kit, LSZH, 900 μ m Multimode, LSZH, ClearCurve®, LC UPC Simplex, Telcordia Standard, Easy strip, 2 m

CORNING

Part Number:
FK12-000301T1Z09AA002M

Pigtails are used for non-permanent connections in patch panels, transmission equipment etc. Factory assembled pigtails allow for high quality termination of a network.

Features and Benefits

Global operations

Worldwide manufacturing facilities and end-to-end vertical integration across the entire process ensure reliable supply and mitigate trade barriers or supply

Flexible design options


Choice of materials for strength elements and fiber properties for various application requirements

Superior Performance Testing

Every termination is tested to ensure the highest in network performance

State-of-the-art manufacturing processes

Advanced technology results in unsurpassed product consistency and quality

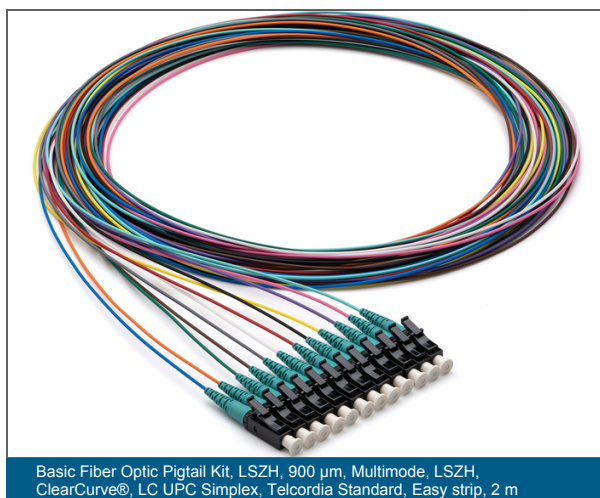

Basic Fiber Optic Pigtail Kit, LSZH, 900 μ m, Multimode, LSZH, ClearCurve®, LC UPC Simplex, Telcordia Standard, Easy strip, 2 m

Basic Fiber Optic Pigtail Kit, LSZH, 900 μ m Multimode, LSZH, ClearCurve®, LC UPC Simplex, Telcordia Standard, Easy strip, 2 m

CORNING

Specifications

General Specifications

Flame Rating	LSZH/FRNC
Fiber Category	50 μ m MM (OM3)
Product Category	Pigtail
Cable Assembly Type	Single fiber
Environment	Indoor
Application	Fiber to the Premises, In-Building Network (IBN), Local Area Network (LAN), Central Office
Packaging	Cardboard box

Standards

Fiber Standards	IEC 60793-2-10 A1-OM3
Reaction to Fire	Eca
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Intermateability	IEC 61754

Environmental Conditions

Temperature Range, Installation	-20 °C to 70 °C (-4 °F to 158 °F)
Temperature Range, Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Design

Fiber Count	1
Outer Jacket Material	LSZH/FRNC
Outer Jacket Color	Aqua
Polarity	Straight-Through, TIA-568 Type-A
Fiber Type	Multimode
Fibers per Port	1

Basic Fiber Optic Pigtail Kit, LSZH, 900 μ m Multimode, LSZH, ClearCurve®, LC UPC Simplex, Telcordia Standard, Easy strip, 2 m

CORNING

Mechanical Specifications

Strip Length	1500 mm
Tensile Strength	5 N
Nominal Outer Diameter	0.9 μ m
Min. Bend Radius Installation	15 mm
Min. Bend Radius Operation	7.5 mm

Optical Characteristics

Fiber Code	T
Performance Option Code	88
Fiber Category	OM3
Fiber Type	Multimode
Fiber Name	50 μ m MM (OM3)
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	IEC 60793-2-10
Fiber Core Diameter	50 μ m
Cladding diameter	125 μ m
Coating diameter	242 μ m
Serial 1 Gigabit Ethernet	750 m / 600 m
Serial 10 Gigabit Ethernet	300 m / -
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km

Specifications - Connector A

Tensile Strength Jacketed Cable	50 N
Durability	$\leq$ 0.2 dB change, 1000 rematings, FOTP-21
Boot Type	Simplex

Basic Fiber Optic Pigtail Kit, LSZH, 900 μ m Multimode, LSZH, ClearCurve®, LC UPC Simplex, Telcordia Standard, Easy strip, 2 m

CORNING

Specifications - Connector B

Polish	UPC
Insertion Loss, Max.	0.6 dB
Tensile Strength Jacketed Cable	50 N
Durability	≤ 0.2 dB change, 500 rematings, FOTP-21
Keyed (security)	No
Boot Color	Beige
Connector Type	LC UPC simplex
Ferrule Material	Ceramic
Housing Color	Black
Housing Material	Composite
Boot Type	Simplex
Reflectance	≤ -40 dB

Dimensions

Length	2 m
Outer Diameter	900 μ m
Weight	32 g

Ordering Information

Product Number	FK12-000301T1Z09AA002M
Packaging Method	Box
Shipping Height	190 mm
Shipping Width	250 mm
Shipping Depth	380 mm
Units per Delivery	1/1

Basic Fiber Optic Pigtail Kit, LSZH, 900 µm Multimode, LSZH, ClearCurve®, LC UPC Simplex, Telcordia Standard, Easy strip, 2 m

The Corning logo consists of the word "CORNING" in a white, serif, all-caps font, centered within a solid blue square.

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.