

CORNING



Introduction 3

Features and Benefits 4

Direct Termination with UniCam® Connectors or Preterminated Assemblies 6


Splice Packs..... 7

Accessories 8

Cleaning Accessories 9





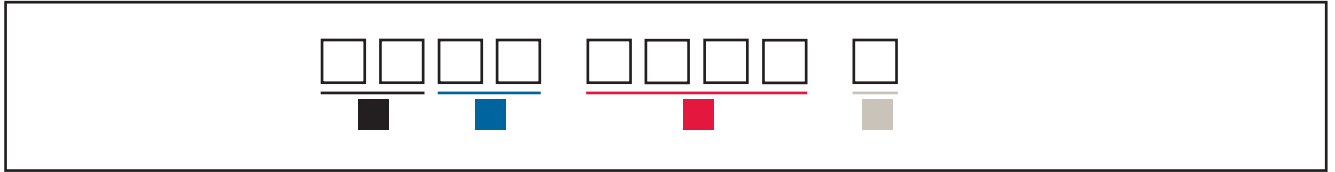

1 Select fibre count.

- 04 = 4 fibres*
- 06 = 6 fibres*
- 08 = 8 fibres*
- 12 = 12 fibres*
- 24 = 24 fibres*
- 36 = 36 fibres*
- 48 = 48 fibres (up to 48 use ADPT or PGTL configuration)
- 72 = 72 fibres (LC only with HDHS, HDCR, ADPT or BRDG configuration)
- 96 = 96 fibres (LC only with HDHS, HDCR, ADPT or BRDG configuration)

3 Select configuration option.

- ADPT = front panel loaded with adapters only (Breakout version)
- PGTL = universal splice pack with 12 pre-installed coloured pigtails (up to 48 fibres), protectors not included
- HDHS = MFT splice tray for up to 24 heat-shrink splice protectors with 12 pre-installed coloured pigtails (protectors not included)
- HDCR = MFT splice cassette for up to 24 crimp splice protectors with 12 pre-installed coloured pigtails (protectors not included)
- BRDG = stackable splice bridge for up to 96 splices and easy loose tube or pigtail management with 12 pre-installed coloured pigtails

2 Select connectivity.

- AD = Shuttered LC Duplex MM/OM3+OM4, aqua
- AV = Shuttered LC Duplex MM/OM4, violet
- AE = Shuttered LC Duplex UPC SM/OS2, blue
- AF = Shuttered LC Duplex APC SM/OS2, green
- E7 = SC Duplex MM/OM3+OM4, aqua
- 72 = SC Duplex UPC SM/OS2, blue
- D9 = SC Duplex APC SM/OS2, green
- 5C = SC Simplex UPC SM/OS2, blue
- 6C = SC Simplex APC SM/OS2, green
- E5 = ST® compatible MM/OM3+OM4, aqua ring
- 19 = ST compatible UPC SM/OS2, blue ring
- 11 = FC SM/OS2, metal
- P5 = E2000 APC Compact SM/OS2, green
- P6 = E2000 UPC Compact SM/OS2, blue
- P1 = E2000 APC Simplex SM/OS2, green
- P2 = E2000 UPC Simplex SM/OS2, blue


4 Select housing colour.

- B = Black
- G = Grey

**Suitable for all adapter types with universal splice packs (heat-shrink/crimp) including 12 pigtails & cover*




Product representation - actual product may vary

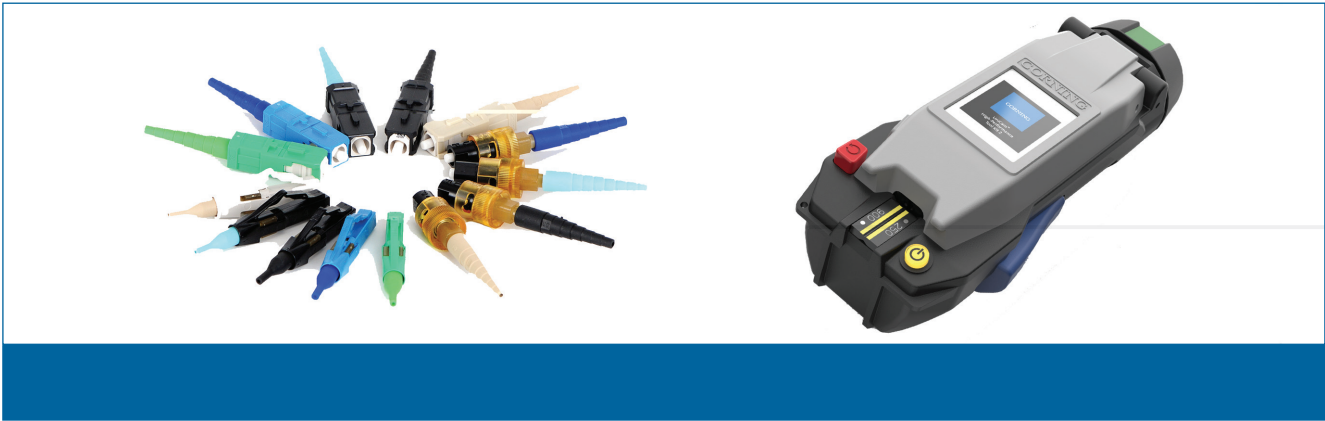

gel-free 250 µm cable, such as the FREEDM™ gel-free

- Splice packs are including 12 Pigtailed of 900 µm TB (Easy Strip) fibres pre-stripped to 250 µm
- Fibres are Telcordia colour-coded on both 900 µm and 250 µm layers
- Pigtailed are 2 m long, 0.8 m 900 µm and 1.2 m 250 µm



	SCALC footprint		

