

Central Tube Dielectric Armour Indoor/ Outdoor Cable

telcordia bellcore

® OM1 CT 3.0

CORNING

The central tube cable construction, by isolating the fibres from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibres in are colour coded for quick, easy identification.

The cable construction, based on a central buffer tube, is very compact, light and flexible, and ideal for connections requiring a moderate fiber count.

These cables are designed for installation in conduits, ducts and in-house.

All-dielectric cable construction

Requires no grounding or bonding

Laminated swelling glass yarns

Improved rodent resistance and longitudinal water protection

UV- and microbe-resistant

Can be installed in ducts or conduits

Small diameter and bend radius

Easy installation in space-constrained areas

Fibres colour coding to Telcordia-Bellcore

Easy identification of the individual fibres

Waterblocking technology

OSP (outdoor) applications

Silicon-free outer jacket

The cable jacket is free of harmful to paint structures

Flame Test Method

Flame retardant to IEC 60332-1-2 (single cable)


Low Smoke to IEC 61034

Zero Halogen to IEC 60754-1

Non Corrosive to IEC 60754-2

Waterblocking

IEC 60794-1-2 F5

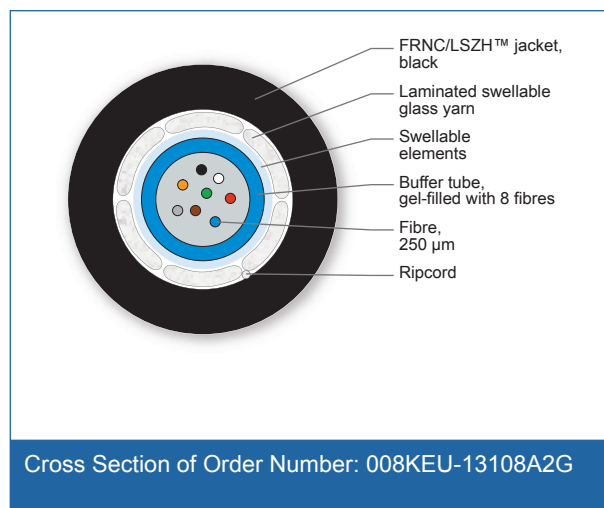

Central Tube Dielectric Armour Indoor/ Outdoor Cable

1x8 G62.5 MMF InfiniCor® OM1 CT 3.0

CORNING

Specifications

| General Specifications | |
|---|--|
| Environment | Indoor / Outdoor |
| Application | Duct, Vertical Riser, General Purpose Horizontal |
| Cable Type | Loose Tube |
| Product Type | Dielectric armour |
| Flame Rating | LSZH™/FRNC |
| Fibre category | 62.5 µm MM (OM1) |
| Coding according to EN 60794-1-1 (DIN VDE 0888-100-1) | U-DQ(ZN)BH |
| Previous Part Number | LCXLM1-M0008-A700 |
| Previous coding following DIN VDE 0888-3 | A-DQ(BN)H |

| Temperature Range | |
|---------------------------|-----------------|
| Installation and Assembly | -5 °C to 50 °C |
| Operation | -20 °C to 60 °C |
| Storage | -25 °C to 70 °C |

| Cable Design | |
|--|---|
| Fibre Count | 8 |
| Fibre colouring | Blue, orange, green, brown, grey, white, red, black |
| Buffer tube diameter | 3 mm |
| Buffer tube colour | blue |
| Tensile Strength Elements and/or Armouring - Layer 1 | Laminated swelling glass yarn armour |
| Number of Ripcords | 1 |
| Outer Jacket Material | Flame-retardant, non-corrosive / low-smoke, zero-halogen (FRNC / LSZH) material |
| Outer Jacket Colour | black |
| Outer Jacket Nominal Thickness | 1.2 mm |
| Cable Marking | Meter Handset Sine CORNING Fibre Optic Cable Year U-DQ(ZN)BH 8 OM1 CT 3.0 LSZH™/ FRNC |

| Mechanical Characteristics Cable | |
|----------------------------------|----------|
| Nominal Outer Diameter | 6.6 mm |
| Weight | 46 kg/km |

Central Tube Dielectric Armour Indoor/ Outdoor Cable

1x8 G62.5 MMF InfiniCor® OM1 CT 3.0

CORNING

Mechanical Characteristics Cable

| | |
|--|--------------|
| Min. Bend Radius Installation | 130 mm |
| Min. Bend Radius Operation | 100 mm |
| Max. Tensile Strength for Installation | 1000 N |
| Crush Resistance (reversible) | 1500 N/10 cm |
| Fire Load | 0.94 MJ/m |

Chemical characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2002/95/EG |
|------|---|

Fibre Specifications

Optical Characteristics (cabled)

| | |
|---|---------------------------|
| Fibre Name | G62.5L/125 InfiniCor® 300 |
| Fibre Core Diameter | 62.5 µm |
| Fibre category | OM1 |
| Fibre Code | K |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.1 dB/km / 0.8 dB/km |
| Typical attenuation | 2.9 dB/km / 0.7 dB/km |
| Serial 1 Gigabit Ethernet | 300 m / 550 m |
| Serial 10 Gigabit Ethernet | 33 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 200 MHz*km / 600 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / - |

Notes: 1) Improved attenuation and bandwidth options available
2) Bend-insensitive single-mode fibres available on request
3) Contact a Corning Customer Care Representative for additional information

Ordering Information

| | |
|---------------------|---|
| Part Number | 008KEU-13108A2G |
| Product Description | Central Tube Dielectric Armour Indoor/Outdoor Cable 1x8 G62.5 MMF InfiniCor® OM1 CT 3.0 |
| EAN Code | 4042673417545 |

Central Tube Dielectric Armour Indoor/ Outdoor Cable

1x8 G62.5 MMF InfiniCor® OM1 CT 3.0

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Shipping Information

| | |
|-------------------------|---------|
| Maximum Delivery Length | 4,000 m |
|-------------------------|---------|

