

FREEDM™ Gel-Free Central Tube Indoor/ Outdoor Cable

4F G50 MMF ClearCurve® OM2 CT 3.0

CORNING

Dry, gel-free tube

All-dielectric cable construction

Laminated swelling glass yarns


UV- and microbe-resistant

Small diameter and bend radius

Fibres colour coding to Telcordia-Bellcore

Waterblocking technology

Silicon-free outer jacket

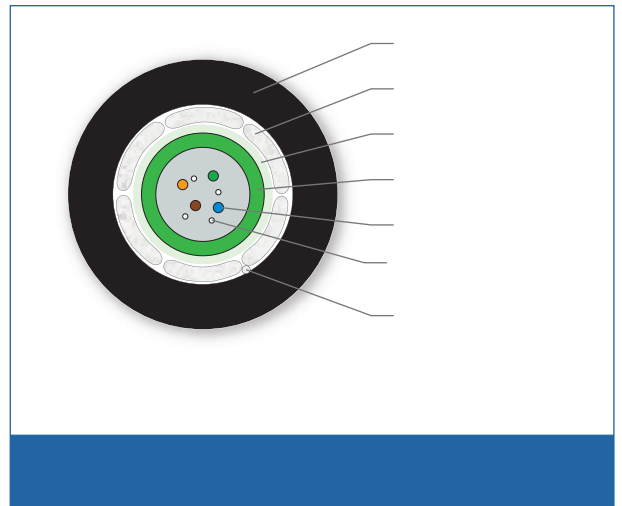

Flame Test Method

Waterblocking

CORNING

FREEDM™ Gel-Free Central Tube Indoor/ Outdoor Cable

4F G50 MMF ClearCurve® OM2 CT 3.0

CORNING

General Specifications

Temperature Range

Cable design

Mechanical Characteristics Cable

CORNING

FREEDM™ Gel-Free Central Tube Indoor/ Outdoor Cable

4F G50 MMF ClearCurve® OM2 CT 3.0



Mechanical Characteristics Cable

Chemical characteristics

--	--

Optical Characteristics (cabled)

*50 µm multimode fibre macrobend loss ≤ 0.2 dB at 850 nm for two turns around 7.5 mm radius mandrel
Improved attenuation and bandwidth options available
Bend-insensitive single-mode fibres available on request
Contact a Corning Customer Care Representative for additional information*



FREEDM™ Gel-Free Central Tube Indoor/ Outdoor Cable

4F G50 MMF ClearCurve® OM2 CT 3.0



CORNING

--	--



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY
00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

CORNING