

# UniCam® Connector, LC



62.5 µm multimode (OM1)

CORNING

Corning UniCam® LC connectors offer optical performance in a fast, easy field-termination solution ideal for fibre-to-the-workstation applications where setup and teardown time is critical. The high-precision mechanical splice technology enables fibre optic networks to be installed quickly and cost effectively. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam High-Performance Tool Kit. The lightweight, handheld installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fibre to the fibre stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam connector is assured to meet the published specification at the time of installation or Corning will replace it.

Corning UniCam® high-performance connectors offer best-in-class optical performance in a fast, easy field-termination solution. These high-precision zirconia ceramic ferrule connectors assured exceptional insertion loss – 0.1 dB typical/0.5 dB maximum per connector pair for multimode, 0.2 dB typical/0.5 dB maximum per connector pair for single-mode. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam high-performance tool kit.

The lightweight, handheld installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fibre to the fibre stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam® connector is assured to meet the published specification at the time of installation or Corning will replace it.

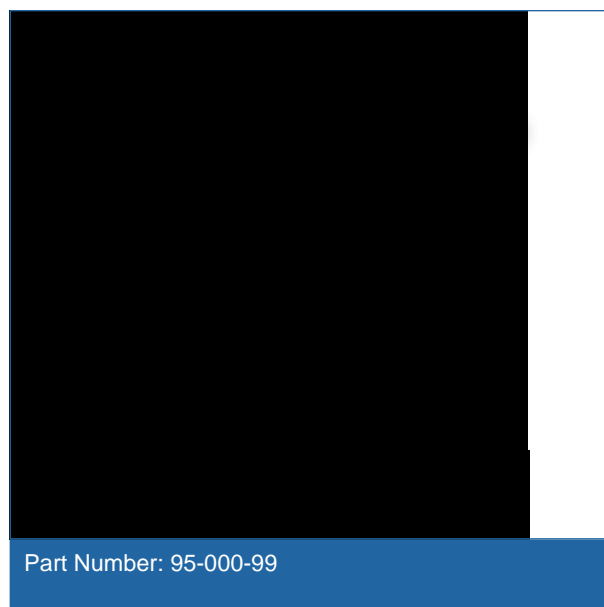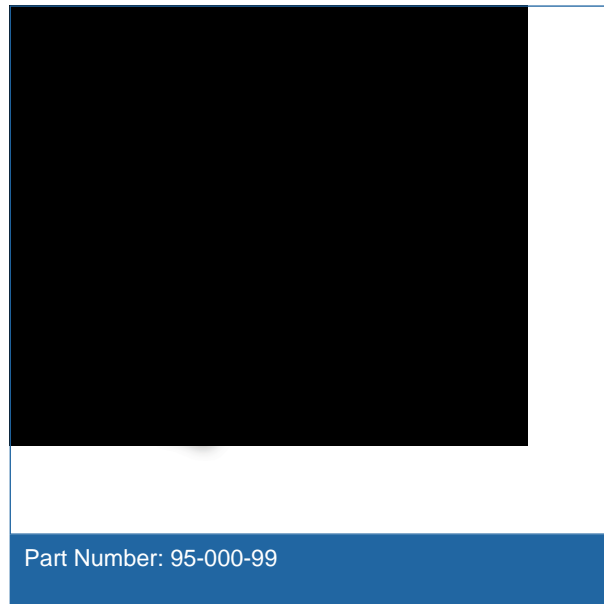

## Features and Benefits

### Performance guarantee

100 percent yield guarantee



## Design - Connector

Housing colour	Beige
Boot colour	Beige

## Mechanical Specifications - Connector

Durability	≤ 0.2 dB change by 500 rematings, FOTP-21
Temperature cycling	≤ 0.3 dB IL, -40° to +75°C, 21 cycles
Nominal fibre outer diameter	125 µm
Tensile strength jacketed cable	50 N, change ≤ 0.2 dB, FOTP-6 (11 lb, change ≤ 0.2 dB, FOTP-6)
Tensile strength 900 µm cable	4.9 N, change ≤ 0.2 dB, FOTP-6 (1.1 lb, change ≤ 0.2 dB, FOTP-6)

## Optical Specifications - Connector

Insertion loss, typical	0.1 dB
Insertion Loss, Maximum	0.5 dB
Reflectance	≤ -26 dB

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Ordering Information

Part Number	95-000-99
Product Description	UniCam® High-Performance Connector, LC, 62.5 µm multi-mode (OM1), ceramic ferrule, logo, single pack, beige housing, beige boot

## Shipping Information

Units per delivery	1/1
sT1 7(1/13tentsS)Tj28.242 0.706 Td[ Connector)55.2(,)128.(T)1373(riggeor)5512(,Crimp Band, Bbooe 905 µ1),Bbooe .0 i)JTmm,1),Bbooe	

# UniCam<sup>®</sup> Connector, LC

62.5 μm multimode (OM1)

The logo consists of a solid blue square with the word "CORNING" written in white, uppercase, sans-serif font in the center.

## Notes



**Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY  
00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)**

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2015 Corning Optical Communications. All rights reserved.