

FutureCom™ Cat. 3 / ISDN Patch Panel 19", 1U, 25 Ports

High-grade steel


CORNING

The FutureCom™ Cat.3 / ISDN telephone patch panel offers a simple and economical way to connect the telephone system or the telephone backbone with the structured wiring.

The telephone connection can be made by one or two pairs (analogue and ISDN technology)

Features

- 19" patch panel, 1U with 25 unshielded RJ45 jacks
- Wire connection via 4-pin LSA/110 connect dual cutting clamps for AWG 22-26
- Wiring according to ISO/IEC 11801/EN 50173-1, configuration: Pin 3/6 and Pin 4/5
- Grounding via M6 screw with nut and lock washer in the patch panel
- Shield connection directly on the circuit board
- Integrated cable strain relief

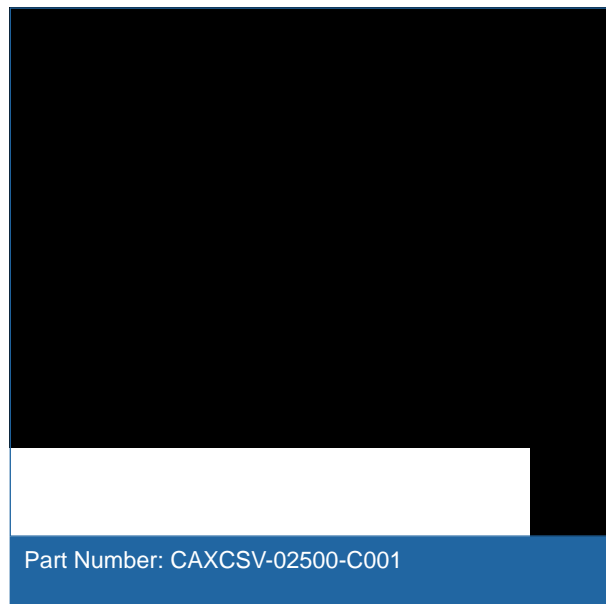

Specifications

General Specifications

Category	3
Dust Protection	No

Temperature Range

Installation and Assembly	-40 °C to 70 °C
Operation	-10 °C to 60 °C

Design - Hardware

Number of Ports	25
Height Unit	1U
Colour	high-grade steel
Housing Material	High-grade steel

FutureCom™ Cat. 3 / ISDN Patch Panel 19", 1U, 25 Ports

High-grade steel



Mechanical Characteristics

Dimensions (L x W x H)	486 mm x 44 mm x 120 mm
------------------------	-------------------------

Chemical characteristics

Environmental Compatibility	Recyclable
RoHS	Free of hazardous substances according to RoHS 2002/95/EG

Ordering Information

Part Number	CAXCSV-02500-C001
Product Description	FutureCom Cat. 3 / ISDN Telephone Patch Panel, unshielded, 25x RJ45, configuration 4.5 and 3.6, LSA-PLUS, 1U
EAN Code	4042673222422
Colour	high-grade steel
Height Unit	1U
Weight	1.05 kg

Shipping Information

Units per Delivery	1/1
--------------------	-----



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY
00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2014 Corning Optical Communications. All rights reserved.