

Central Tube Steel Armour Indoor/Outdoor Cable

24F E9 SMF-28e+® ITU G652.D CT 5.0

CORNING

Corning MPC (multi-purpose cable) central tube cables with corrugated steel armoring are flame-retardant, indoor/outdoor cables designed for interbuilding and intrabuilding backbones in duct, direct burial and riser applications.

The central tube cable construction, by isolating the fibres from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibres are colour coded for quick, easy identification.

The cable construction, based on a central buffer tube, is very compact, light and flexible, and ideal for connections requiring a moderate fiber count.

These cables are designed for installation in conduits, ducts, direct burial and in-house.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

UV- and microbe-resistant

Can be installed in ducts or conduits

Corrugated steel armoring

Rodent, mechanical protection and direct buried applications

Small diameter and bend radius

Easy installation in space-constrained areas

Fibres colour coding to Telcordia-Bellcore

Easy identification of the individual fibres

Silicon-free outer jacket

The cable jacket is free of harmful to paint structures

Standards

Flame Test Method

Flame retardant to IEC 60332-1-2 (single cable)


Low Smoke to IEC 61034

Zero Halogen to IEC 60754-1


Non Corrosive to IEC 60754-2

Waterblocking

IEC 60794-1-2 F5

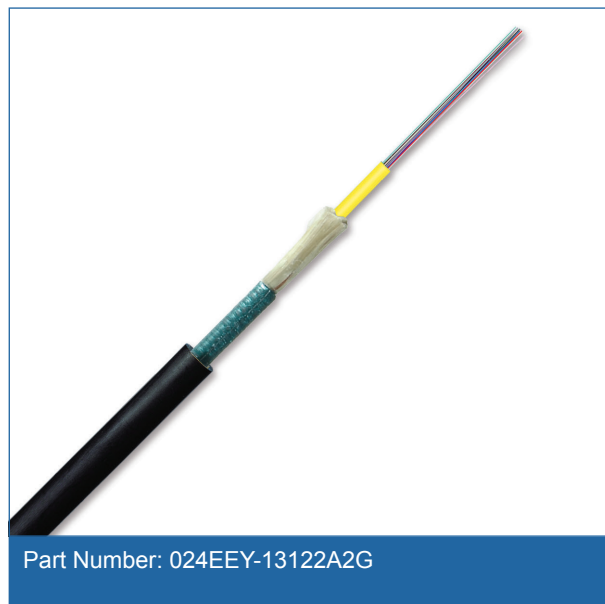

Part Number: 024EEY-13122A2G

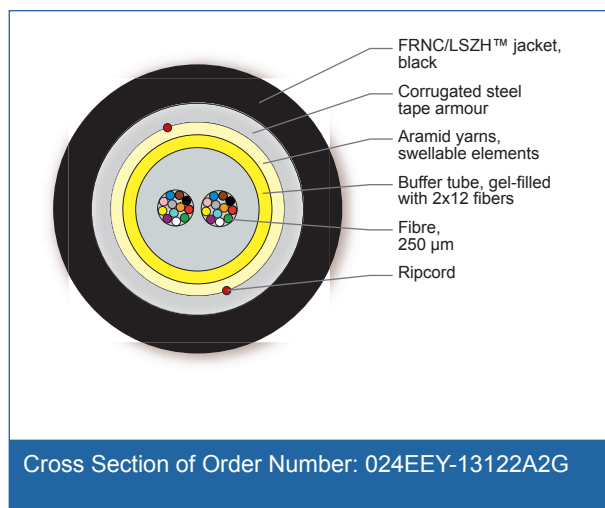

Cross Section of Order Number: 024EEY-13122A2G

Central Tube Steel Armour Indoor/Outdoor Cable

24F E9 SMF-28e+® ITU G652.D CT 5.0

CORNING

Specifications

General Specifications	
Environment	Indoor / Outdoor
Application	Direct Buried, Duct, Vertical Riser, General Purpose Horizontal
Cable Type	Loose Tube
Product Type	Corrugated steel armour
Flame Rating	LSZH™/FRNC
Fibre category	SM (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)(SR)H
Previous Part Number	FWCT01-S0024-U004
Previous coding following DIN VDE 0888-3	A-DQ(ZN)(SR)H

Temperature Range	
Installation and Assembly	-5 °C to 50 °C
Operation	-20 °C to 60 °C
Storage	-25 °C to 70 °C

Cable Design	
Fibre Count	24
Number of fibres per bundle	12
Fibre colouring	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
Number of fibre bundles	2
Fibre bundle colouring	Blue, orange
Buffer tube colour	yellow
Buffer tube diameter	5 mm
Number of Ripcords	2
Tensile Strength Elements and/or Armouring - Layer 1	Corrugated steel tape armour with dielectric strength elements (aramid yarns) and swellable elements
Outer Jacket Material	Flame-retardant, non-corrosive / low-smoke, zero-halogen (FRNC / LSZH) material
Outer Jacket Colour	black
Outer Jacket Nominal Thickness	1.5 mm
Cable Marking	Meter Handset Sine CORNING Fibre Optic Cable Year U-DQ(ZN)(SR)H 24 E9 CT 5.0 LSZH™/ FRNC

Central Tube Steel Armour Indoor/Outdoor Cable

24F E9 SMF-28e+® ITU G652.D CT 5.0

CORNING

Mechanical Characteristics Cable

Nominal Outer Diameter	9.7 mm
Weight	114 kg/km
Min. Bend Radius Installation	195 mm
Min. Bend Radius Operation	145 mm
Max. Tensile Strength for Installation	1500 N
Crush Resistance (reversible)	3000 N/10 cm
Fire Load	1.91 MJ/m

Chemical characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fibre Specifications

Optical Characteristics (cabled)

Fibre Name	E9/125 SMF28e+
Fibre Core Diameter	8.2 µm
Fibre category	OS2
Fibre Code	E
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m
Cable cutoff wavelength	1260 nm

- Notes:
- 1) Meets 0.75 ns optical skew when used in all Corning Plug and Play™/Pretium EDGE® systems solutions.
 - 2) Improved attenuation and bandwidth options available
 - 3) Bend-insensitive single-mode fibres available on request
 - 4) Contact a Corning Customer Care Representative for additional information

Ordering Information

Part Number	024EEY-13122A2G
Product Description	Central Tube Steel Armour Indoor/Outdoor Cable 24F E9 SMF-28e+® ITU G652.D CT 5.0
EAN Code	4042673196242

Central Tube Steel Armour Indoor/Outdoor Cable

24F E9 SMF-28e+® ITU G652.D CT 5.0

The CORNING logo is a blue square with the word "CORNING" in white, uppercase, sans-serif font centered inside.

Shipping Information

Maximum Delivery Length	6,000 m
-------------------------	---------



**Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY
00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea**

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2014 Corning Optical Communications. All rights reserved.